

CANWAY

EQUIPMENT MFG. INC.

Material Handling Equipment

www.canwayequipment.com



PRODUCT CATALOGUE

CANWAY
EQUIPMENT MFG. INC.
Material Handling Equipment
ORDER CARTS PLATFORM TRUCKS
BOX CARTS GAS CYLINDER CAGES
STAINLESS STEEL APPLIANCE
CROSSOVER LADDER
CARTS WORK PLATFORMS
TABLE CADDIES LUMBER CARTS
RACKS

MOBILE LADDER STANDS
ALUMINUM DRUM TRUCKS
HANDTRUCKS BAGGAGE
SAFETY ANGLES CARTS
DEDICATION STANDS
WORK PLATFORMS
TRUCKS SERVICE CARTS
SELF DUMPING HOPPER
UTILITY CARTS STOCK PICKERS
STORAGE RACKS
STANDS COMMITMENT
BUS ACCESS PLATFORMS
CYLINDER CARTS DOLLIES
RESPECT LADDERS

ESTABLISHED IN
1986

Company Profile

Since 1986, Canway Equipment Mfg. Inc. has been manufacturing and supplying the industrial, institutional, commercial, retail, mining, forestry and transportation industries of North America with a broad range of material handling products.

A brief summary of the products Canway manufactures are: mobile ladder stands, crossover ladders, work platforms, appliance trucks, hand trucks, lumber carts, table and chair caddies, drum handling, cylinder carts, shelf trucks, stock pickers, platform trucks, wagon trucks, box carts, gas cylinder storage units, bar & bicycle racks, and custom manufacturing.

Canway is a family owned and operated business that continually strives to provide high quality material handling products, professional services, and innovative solutions to our customers, through our valued distributors at competitive prices.

Thank you for choosing Canway products.



1 Handtrucks



Handtrucks for:

- appliances
- pails
- baggage
- chairs
- bread
- kegs

2 Wheel Carts



For:

- tables
- drywall
- lumber
- large panels

3 Drum & Cylinder Trucks



- dollies
- loading pallets
- upenders
- rockers
- cylinders

4 Carts & Benches



- service & utility
- order picking
- machine stands

5 Stock Carts



6 Stock Pickers



- pick and transport

7 Platform/Wagon Trucks



- light to extra heavy duty
- steel, wood or aluminum deck

8 Box Carts / 3-Sided Carts



- solid steel or steel mesh

9 Cylinder Storage




- safe storage solution for gas cylinders

10 Racks



- bars
- bicycles
- stationary
- mobile

11 Lift Truck Attachments

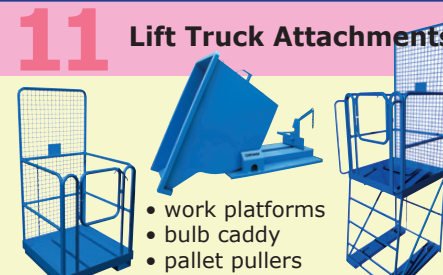

- work platforms
- bulb caddy
- pallet pullers
- self-dump hoppers

12 Ladders



- mobile
- electric & manual
- rolling
- rotate-in-place
- tilt and roll
- crossover
- specialty access

13 Casters & Wheels



14 Handrails / Guarding



15 Specialty / Custom Products



16 Ladder Inspection & Repair



17 Custom Powder Coating



18 Photo Gallery



TERMS AND CONDITIONS

Orders:

- Confirmed Purchase Orders with Shipping Instructions are required for all orders prior to manufacturing.
- The minimum order amount from CANWAY is \$100.00, net cost of goods.
- Products may not be exactly as shown in the catalogue or product brochure.

Freight Policy:

- All shipments are F.O.B. CANWAY Equipment Mfg. Inc., Hamilton, ON.

Payments:

- Cash, Certified Cheque, VISA or Credit (Balance Due Net 30 days on Approved Credit)
- All applicable taxes are extra.
- CANWAY reserves the right to withhold shipment on any Overdue Account.

Returned Goods:

- Factory stock items may only be returned with an RGA # (Return Goods Authorization number) issued by a Canway customer service representative.
- The RGA # must be attached to the product.
- 20% Restocking Charge applies on all Returned Goods.
- All non-stock standard products are not returnable.
See Price List for factory stock items.

LIMITED WARRANTY

CANWAY EQUIPMENT MFG. INC. (hereinafter "Company") warrants that its products sold under the "Canway" trade name in Canada are free from defects in workmanship and materials under normal use and service.

This warranty does not cover defects or damage arising from improper installation, lack of or improper maintenance, improper storage, shipping and handling, ordinary wear and tear, misuse, abuse, accident or unauthorized service.

We expect that our Customer will inspect the products upon receipt. If damage has resulted from shipment, the Customer's only remedy is by making claim against the Carrier.

The only liability of the Company, whether in tort, or in contract under this warranty, shall be limited to the repair or replacement of any product or component which shall prove defective as covered by this warranty, within six (6) months after delivery to the original purchaser from the Company. The Company will not pay for the cost of repair performed other than in accordance with this warranty.

Written notice of a product or component believed to be defective as covered by this warranty should be sent to the Company, Customer Service Department.

Notice should include your name and address, an identification of the product or component, with proof of purchase and a brief description of the defect. Upon receipt of such notice, the Company will contact you as to where to ship such product or component (shipping charges prepaid) for examination and, in the event such examination reveals a defect covered by this warranty, the product will be repaired or replaced.

This warranty is in lieu of all other express or implied warranties. Under no circumstances shall Canway be liable for any incidental or consequential damages, including, without limitation, lost profits, loss of income, loss of business opportunity, and other losses or expenses.



1284-EC-8SR

1284-EC

- Eccentric bar locking system c/w two-piece belt
- Roller stairclimbers
- Non-marking vinyl on contact surfaces
- Durable red powder coat finish

Part Number	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Shipping Size WxDxH (in.)	Toe Plate Size (in.)	Weight (lbs.)
♦ 1284-EC-8SR	8x2 Solid Rubber	800	24x15x59	24x5	46
1284-EC-8C	8x2 Cushion Rubber	600	24x15x59	24x5	46

Parts for 1284-EC:

CRA-1284-EC – Complete Ratchet Assembly Set (includes all of the separate parts shown here)



1284V-8SR side view

1284V-8SR

1284-8SR


1284, 1284V

- Standard ratchet locking system
- Roller stairclimbers
- Non-marking vinyl on contact surfaces
- Flip out casters give extra support to heavy loads on 1284V
- Durable red powder coat finish



Part Number	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Shipping Size WxDxH (in.)	Toe Plate Size (in.)	Weight (lbs.)
♦ 1284-8SR	8x2 Solid Rubber	800	24x15x59	24x5	49
1284-8C	8x2 Cushion Rubber	600	24x15x59	24x5	49
♦ 1284V-8SR	8x2 Solid Rubber	1200	24x15x72	24x5	72
1284V-8C	8x2 Cushion Rubber	900	24x15x72	24x5	72

Parts for 1284 & 1284V:

♦ **HDAS - Holding Dog Assembly Set** (includes all of the separate parts shown here)



♦ **CRA-1284 – Complete Ratchet Assembly Set** (includes all of the separate parts shown here)

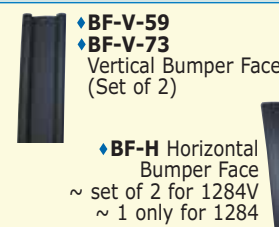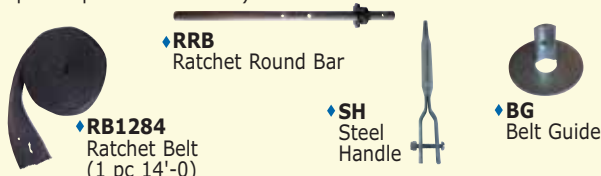

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ 8C ♦
8" cushion rubber



♦ 8SR ♦
8" solid rubber



1284-AR

- Auto-rewind ratchet locking system
- Non-marking vinyl on contact surfaces
- Roller stairclimbers
- Durable red powder coat finish

Part Number	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Shipping Size WxDxH (in.)	Toe Plate Size (in.)	Weight (lbs.)
♦1284-AR-8SR	8x2 Solid Rubber	800	24x15x59	24x5	50
1284-AR-8C	8x2 Cushion Rubber	600	24x15x59	24x5	50

Parts for 1284-AR:

- ♦HDAS - Holding Dog Assembly Set (includes all of the separate parts shown here)



- ♦CRA-1284-AR - Complete Ratchet Assembly Set (includes all of the separate parts shown here)



1284-AR-8SR

Wheel Description

For all wheel & caster info & details, please see Section 13.



8C
8" cushion rubber



8SR
8" solid rubber

1284V-AR


- Standard locking system - available with auto-rewind ratchet locking system
- Roller stairclimbers
- Non-marking vinyl on contact surfaces
- Flip out casters give extra support to heavy loads
- Durable red powder coat finish

Part Number	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Shipping Size WxDxH (in.)	Toe Plate Size (in.)	Weight (lbs.)
♦1284V-AR-8SR	8x2 Solid Rubber	1200	24x15x72	24x5	72
1284V-AR-8C	8x2 Cushion Rubber	900	24x15x72	24x5	72

Parts for 1284V-AR:

- ♦HDAS - Holding Dog Assembly Set

(includes all of the separate parts shown here)



1284-V-AR-8SR

- ♦CRA-1284-AR - Complete Ratchet Assembly Set (includes all of the separate parts shown here)





ELB

- Standard loop handle handtruck
- Basket style back
- 1" x 14 ga. tube construction
- Option: FDN – Fold down toe plate, 24" deep
- Durable blue powder coat finish

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ **8SR**
8" solid rubber



♦ **8C or 10C**
8" or 10" cushion rubber



♦ **8PN**
8" pneumatic



♦ **10PN**
10" pneumatic

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
♦ ELB-8SR	14x8	8x2 Solid Rubber	600	27	19x17x47
ELB-8C	14x8	8x2.5 Cushion Rubber	600	28	19x17x47
ELB-8PN	14x8	8x2 Pneumatic	600	27	20x17x47
♦ ELB-10PN	14x8	10x3 Pneumatic	600	27	21x19x47
ELB-10C	14x8	10x2.5 Cushion Rubber	600	33	19x19x47
ELB-FDN-8SR	14x8	8x2 Solid Rubber	600	33	19x17x47
ELB-FDN-8C	14x8	8x2.5 Cushion Rubber	600	34	19x17x47
ELB-FDN-8PN	14x8	8x2 Pneumatic	600	33	20x17x47
ELB-FDN-10PN	14x8	10x3 Pneumatic	600	33	21x19x47
ELB-FDN-10C	14x8	10x2.5 Cushion Rubber	600	39	19x19x47

EDB

- Standard double grip handle handtruck
- Basket style back
- 1" x 14 ga. tube construction
- Option: FDN – Fold down toe plate, 24" deep (shown on ELB above)
- Durable blue powder coat finish

Parts for EDB:



♦ **GH1**
Grip Handle,
1" ID

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
♦ EDB-8SR	14x8	8x2 Solid Rubber	600	27	19x17x47
EDB-8C	14x8	8x2.5 Cushion Rubber	600	28	19x17x47
EDB-8PN	14x8	8x2 Pneumatic	600	27	20x17x47
♦ EDB-10PN	14x8	10x3 Pneumatic	600	27	21x19x47
EDB-10C	14x8	10x2.5 Cushion Rubber	600	33	19x19x47
EDB-FDN-8SR	14x8	8x2 Solid Rubber	600	33	19x17x47
EDB-FDN-8C	14x8	8x2.5 Cushion Rubber	600	34	19x17x47
EDB-FDN-8PN	14x8	8x2 Pneumatic	600	33	20x17x47
EDB-FDN-10PN	14x8	10x3 Pneumatic	600	33	21x19x47
EDB-FDN-10C	14x8	10x2.5 Cushion Rubber	600	39	19x19x47



DHB

- D-handle handtruck
- Basket style back
- 1" x 14 ga. tube construction
- Option: FDN – Fold down toe plate, 24" deep (shown on ELB on previous page)
- Durable blue powder coat finish

Part Number Size	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping WxDxH (in.)
♦ DHB-8SR	14x8	8x2 Solid Rubber	600	27	19x17x51
DHB-8C	14x8	8x2.5 Cush. Rubber	600	29	19x17x51
DHB-8PN	14x8	8x2 Pneumatic	600	28	20x17x51
♦ DHB-10PN	14x8	10x3 Pneumatic	600	27	21x20x51
DHB-10C	14x8	10x2.5 Cush. Rubber	600	34	19x19x51
DHB-FDN-8SR	14x8	8x2 Solid Rubber	600	33	19x17x51
DHB-FDN-8C	14x8	8x2.5 Cush. Rubber	600	35	19x17x51
DHB-FDN-8PN	14x8	8x2 Pneumatic	600	34	20x17x51
DHB-FDN-10PN	14x8	10x3 Pneumatic	600	33	21x20x51
DHB-FDN-10C	14x8	10x2.5 Cush. Rubber	600	40	19x19x51

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ 8SR
8" solid rubber



♦ 8C or 10C
8" or 10" cushion rubber



♦ 8PN
8" pneumatic



♦ 10PN
10" pneumatic



MLB

- Heavy duty loop handle handtruck
- Basket style back
- 1" x 14 ga. tube construction
- Double reinforced toe plate
- Option: FDN – Fold down toe plate, 24" deep (shown on ELB on previous page)
- Low loop cart available
- Durable blue powder coat finish



Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
MLB-8SR	14x8	8x2 Solid Rubber	800	28	19x17x47
MLB-8C	14x8	8x2.5 Cushion Rubber	600	29	19x17x47
MLB-8PN	14x8	8x2 Pneumatic	600	28	20x17x47
♦ MLB-10PN	14x8	10x3 Pneumatic	600	28	21x20x47
MLB-10C	14x8	10x2.5 Cushion Rubber	600	34	19x19x47
MLB-FDN-8SR	14x8	8x2 Solid Rubber	800	34	19x17x47
MLB-FDN-8C	14x8	8x2.5 Cushion Rubber	800	34	19x17x47
MLB-FDN-8PN	14x8	8x2 Pneumatic	600	34	20x17x47
MLB-FDN-10PN	14x8	10x3 Pneumatic	600	34	21x20x47
MLB-FDN-10C	14x8	10x2.5 Cushion Rubber	600	34	19x19x47
MLB-LL-8SR	14x8	8x2 Solid Rubber	600	26	19x17x41
MLB-LL-10PN	14x8	10x3 Pneumatic	600	26	21x20x41
MLB-LL-FDN-8SR	14x8	8x2 Solid Rubber	600	32	19x17x41
MLB-LL-FDN-10PN	14x8	10x3 Pneumatic	600	32	21x20x41



MDB-8SR

MDB-10PN

MDB

- Heavy duty double grip handtruck
- Basket style back
- 1" x 14 ga. tube construction
- Double reinforced toe plate
- Option: FDN – Fold down toe plate, 24" deep (shown on ELB on previous page)
- Durable blue powder coat finish

Parts for MDB:



- ◆ GH1 Grip Handle, 1" ID

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
MDB-8SR	14x8	8x2 Solid Rubber	800	28	19x17x47
MDB-8C	14x8	8x2.5 Cush. Rubber	600	29	19x17x47
MDB-8PN	14x8	8x2 Pneumatic	600	28	20x17x47
MDB-10PN	14x8	10x3 Pneumatic	600	28	21x20x47
MDB-10C	14x8	10x2.5 Cush. Rubber	600	34	19x19x47
MDB-FDN-8SR	14x8	8x2 Solid Rubber	600	34	19x17x47
MDB-FDN-8C	14x8	8x2.5 Cush. Rubber	600	35	19x17x47
MDB-FDN-8PN	14x8	8x2 Pneumatic	600	34	20x17x47
MDB-FDN-10PN	14x8	10x3 Pneumatic	600	34	21x20x47
MDB-FDN-10C	14x8	10x2.5 Cush. Rubber	600	40	19x19x47

ERGLB


- Ergonomic design with straight loop and double grip handles
- Basket style back
- 1" x 14 ga. tube construction
- Option: FDN – Fold down toe plate, 24" deep (shown on ELB on previous page)
- Durable blue powder coat finish

Parts for ERGLB:



- ◆ GH1 Grip Handle, 1" ID

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
ERGLB-8SR	14x8	8x2 Solid Rubber	600	33	19x17x52
ERGLB-10PN	14x8	10x3 Pneumatic	600	33	21x20x52
ERGLB-FDN-8SR	14x8	8x2 Solid Rubber	600	39	19x17x52
ERGLB-FDN-10PN	14x8	10 x 3 Pneumatic	600	40	21x20x52

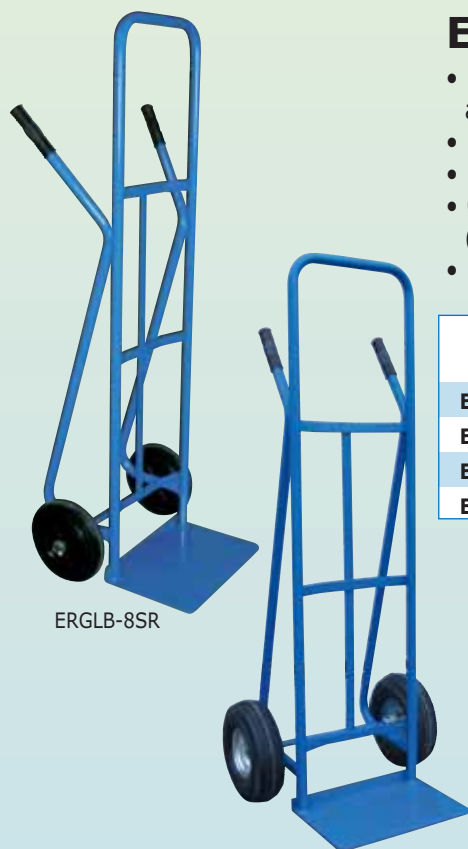

ERGLB-8SR

ERGLB-10PN

Wheel Description

For all wheel & caster info & details, please see Section 13.




- ◆ **8SR**
8" solid rubber



- ◆ **8C or 10C**
8" or 10" cushion rubber



- ◆ **8PN**
8" pneumatic



- ◆ **10PN**
10" pneumatic



HL-8C

LL-8SR

HL & LL

- High loop handle handtruck
- Straight back design
- 1" x 14 ga. tube construction
- Steel stair glides
- Option: low loop
- Option: FDN – Fold down toe plate, 24" deep (shown on ELB on page 1.3)
- Durable blue powder coat finish

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
HL-8SR	14x8	8x2 Solid Rubber	800	32	19x17x51
HL-8C	14x8	8x2.5 Cush. Rubber	600	33	19x17x51
HL-8PN	14x8	8x2 Pneumatic	600	32	20x17x51
HL-10PN	14x8	10x3 Pneumatic	600	33	21x19x51
HL-10C	14x8	10x3 Cushion Rubber	600	38	19x19x51
HL-FDN-8SR	14x8	8x2 Solid Rubber	600	38	19x17x51
HL-FDN-8C	14x8	8x2.5 Cush. Rubber	600	39	19x17x51
HL-FDN-8PN	14x8	8x2 Pneumatic	600	38	20x17x51
HL-FDN-10PN	14x8	10 x 3 Pneumatic	600	39	21x19x51
HL-FDN-10C	14x8	10x2.5 Cush. Rubber	600	44	19x19x51
LL-8SR	14x8	8x2 Solid Rubber	800	30	20x17x45
LL-8C	14x8	8x2.5 Cush. Rubber	600	31	19x17x45
LL-8PN	14x8	8x2 Pneumatic	600	30	19x17x45
LL-FDN-8SR	14x8	8x2 Solid Rubber	600	36	20x17x45
LL-FDN-8C	14x8	8x2.5 Cush. Rubber	600	37	19x17x45
LL-FDN-8PN	14x8	8x2 Pneumatic	600	36	19x17x45

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ **8SR**
8" solid rubber



♦ **8C or 10C**
8" or 10" cushion rubber



♦ **8PN**
8" pneumatic



♦ **10PN**
10" pneumatic

HD & LD

- High double handle handtruck
- Straight back design
- 1" x 14 ga. tube construction
- Steel stair glides
- Option: Low loop
- Option: FDN – Fold down toe plate, 24" deep (shown on ELB on page 1.3)
- Durable blue powder coat finish

Parts for HD & LD:




♦ **GH1**
Grip Handle,
1" ID

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
HD-8SR	14x8	8x2 Solid Rubber	800	32	19x17x51
HD-8C	14x8	8x2.5 Cush. Rubber	600	33	19x17x51
HD-8PN	14x8	8x2 Pneumatic	600	32	20x17x51
HD-10PN	14x8	10x3 Pneumatic	600	33	21x19x51
HD-10C	14x8	10x2.5 Cush. Rubber	600	38	19x19x51
HD-FDN-8SR	14x8	8x2 Solid Rubber	600	38	19x17x51
HD-FDN-8C	14x8	8x2.5 Cush. Rubber	600	39	19x17x51
HD-FDN-8PN	14x8	8x2 Pneumatic	600	38	20x17x51
HD-FDN-10PN	14x8	10 x 3 Pneumatic	600	39	21x19x51
HD-FDN-10C	14x8	10x2.5 Cush. Rubber	600	44	19x19x51
LD-8SR	14x8	8x2 Solid Rubber	800	30	19x17x45
LD-8C	14x8	8x2.5 Cush. Rubber	600	31	19x17x45
LD-8PN	14x8	8x3 Pneumatic	600	30	20x17x45
LD-FDN-8C	14x8	8x2.5 Cush. Rubber	600	36	19x17x45
LD-FDN-8PN	14x8	8x2 Pneumatic	600	37	20x17x45
LD-FDN-8SR	14x8	8x2 Solid Rubber	600	36	19x17x45



HD-8SR

LD-8SR

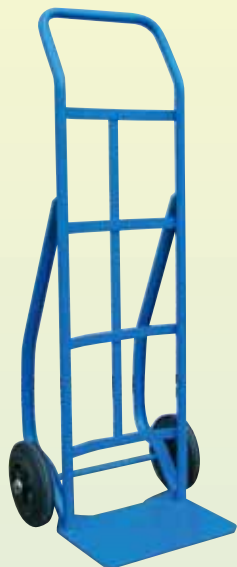

3020PT-8SR

3020PT

- Pail Trucker
- Basket style back
- 1" x 14 ga. tube construction
- Option: FDN – Fold down toe plate, 24" deep (shown on ELB on page 1.3)
- Durable blue powder coat finish

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
3020PT-8SR	14x8	8x2 Solid Rubber	800	32	19x17x47
3020PT-8C	14x8	8x2.5 Cush. Rubber	600	33	19x17x47
3020PT-8PN	14x8	8x2 Pneumatic	600	32	20x17x47
3020PT-10PN	14x8	10x3 Pneumatic	600	33	21x97x47
3020PT-10C	14x8	10x2.5 Cush. Rubber	600	38	19x19x47
3020PT-FDN-8SR	14x8	8x2 Solid Rubber	600	38	19x17x47
3020PT-FDN-8C	14x8	8x2.5 Cush. Rubber	600	39	19x17x47
3020PT-FDN-8PN	14x8	8x2 Pneumatic	600	38	20x17x47
3020PT-FDN-10PN	14x8	10 x 3 Pneumatic	600	39	21x19x47
3020PT-FDN-10C	14x8	10x2.5 Cush. Rubber	600	44	19x17x47

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ **8SR**
8" solid rubber



♦ **8C or 10C**
8" or 10" cushion rubber



♦ **8PN**
8" pneumatic



♦ **10PN**
10" pneumatic



SHL-8SR

SHL

- Super heavy duty handtruck
- Basket style back
- Tube stair glides
- 1" x 14 ga. tube construction
- Option: FDN – Fold down toe plate, 24" deep (shown on ELB on page 1.3)
- Durable blue powder coat finish

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
SHL-8SR	14x8	8x2 Solid Rubber	800	32	19x19x47
SHL-8C	14x8	8x2.5 Cush. Rubber	600	33	19x17x47
SHL-8PN	14x8	8x2 Pneumatic	600	32	20x19x47
SHL-10PN	14x8	10x3 Pneumatic	600	32	19x21x47
SHL-10C	14x8	10x2.5 Cush. Rubber	600	35	19x19x47
SHL-FDN-8SR	14x8	8x2 Solid Rubber	800	37	19x19x47
SHL-FDN-8C	14x8	8x2.5 Cush. Rubber	600	38	19x19x47
SHL-FDN-8PN	14x8	8x2 Pneumatic	600	37	20x19x47
SHL-FDN-10PN	14x8	10x3 Pneumatic	600	38	19x21x47
SHL-FDN-10C	14x8	10x2.5 Cush. Rubber	600	43	19x19x47



2006-8SR

2006

- Double hook handle design
- Steel stair glides
- Tapered toe plate
- 1" x 14 ga. tube construction
- Option: FDN – Fold down toe plate, 24" deep (shown on ELB on page 1.3)
- Durable blue powder coat finish

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
2006-8SR	14x8	8x2 Solid Rubber	650	32	19x17x47
2006-8C	14x8	8x2.5 Cush. Rubber	600	33	19x17x47
2006-8PN	14x8	8x2 Pneumatic	600	32	20x17x47
2006-FDN-8SR	14x8	8x2 Solid Rubber	800	37	19x17x47
2006-FDN-8C	14x8	8x2.5 Cush. Rubber	600	37	19x17x47
2006-FDN-8PN	14x8	8x2 Pneumatic	600	37	20x17x47



980-8SR

980

- Baggage cart
- Straight back design with double grip handles
- 1" x 14 ga. tube construction
- Fold down toe plate, 24" deep
- Durable blue powder coat finish

Parts for 980:



◆ **GH1**
Grip Handle,
1" ID

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
980-8SR	14X8	8x2 Solid Rubber	600	30	19x17x51
980-8C	14X8	8x2.5 Cush. Rubber	600	34	19x17x51
980-8PN	14X8	8x2 Pneumatic	600	33	20x17x51
980-10PN	14X8	10x3 Pneumatic	600	30	21x19x51
980-10C	14X8	10x2.5 Cush. Rubber	600	30	19x19x51

Wheel Description
For all wheel & caster info & details, please see Section 13.



801-8SR

801

- Chair mover handtruck
- Fold down toe plate, 24" deep
- Wheel guards
- 1" x 14 ga. tube construction
- Durable blue powder coat finish

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
801-8SR	14X8	8x2 Solid Rubber	800	35	19x17x47
801-8C	14X8	8x2.5 Cush. Rubber	600	37	19x17x47
801-8PN	14X8	8x2 Pneumatic	600	36	20x17x47




◆ **8SR**
8" solid rubber




◆ **8C or 10C**
8" or 10" cushion rubber



◆ **8PN**
8" pneumatic



◆ **10PN**
10" pneumatic

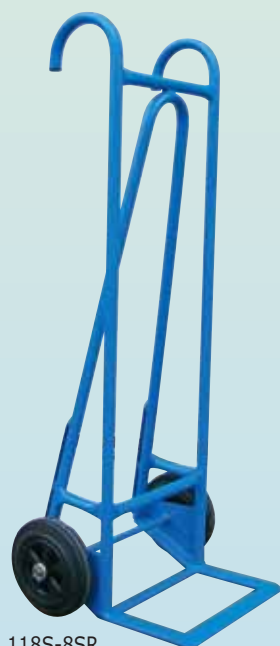

118S-8SR

118S

- Double hook handle design
- Straight back design
- Open toe plate
- 1" x 14 ga. tube construction
- Option: FDN – Fold down toe plate, 24" deep (as shown on 980 above)
- Durable blue powder coat finish

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
118S-8SR	14X8	8x2 Solid Rubber	800	32	20x17x47
118S-8C	14X8	8x2.5 Cush. Rubber	600	33	20x17x47
118S-8PN	14X8	8x2 Pneumatic	600	32	21x17x47
118S-FDN-8SR	14X8	8x2 Solid Rubber	800	32	20x17x47
118S-FDN-8C	14X8	8x2.5 Cush. Rubber	600	38	20x17x47
118S-FDN-8PN	14X8	8x2 Pneumatic	600	37	21x17x47

HL3S

- Convertible handtruck
- Converts from handtruck to platform truck
- Straight back design, high loop
- 1-5/16" x 14 ga. tube construction (handles are 1" x 14 ga. tubing)
- Wheel guards
- Durable blue powder coat finish

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
HL3S-8SR	14X8	8x2 Solid Rubber	800	50	19x16x51
HL3S-8C	14X8	8x2.5 Cush. Rubber	600	50	19x16x51
HL3S-10PN	14X8	10x3 Pneumatic	600	50	19x18x51
HL3S-10C	14X8	10x2.5 Cush. Rubber	600	50	19x18x51



HL3S-8SR




HL3S-8SR

Parts for HL3S and LL3S:



LL3S-8SR

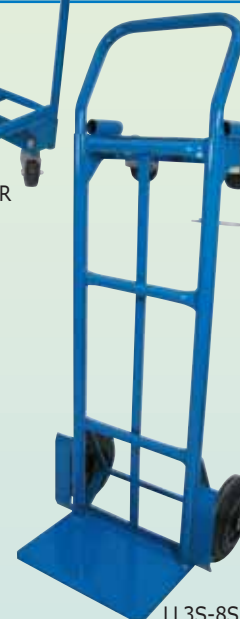

LL3S-8SR

LL3S

- Convertible handtruck
- Converts from handtruck to platform truck
- Straight back design, low loop
- 1-5/16" x 14 ga. tube (handles are 1" x 14 ga. tube)
- Wheel guards
- Durable blue powder coat finish

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
LL3S-8SR	14X8	8x2 Solid Rubber	600	45	19x18x45
LL3S-8C	14X8	8x2.5 Cush. Rubber	600	45	19x18x45
LL3S-10PN	14X8	10x3 Pneumatic	600	45	19x20x45
LL3S-10C	14X8	10x2.5 Cush. Rubber	600	45	19x20x45

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ 8SR
8" solid rubber



♦ 10SR
10" solid rubber



♦ 8C or 10C
8" or 10" cushion rubber



♦ 10PN
10" pneumatic



♦ 10MR
10" molded rubber

Wheels for 3051:

Parts for 3051:



♦ GH1.25
Grip Handle,
1.25" ID



♦ 10MR
10" molded rubber



♦ 10SR
10" solid rubber

3051

- Warehouse handtruck
- Slanted back design
- Double grip handle
- 1-5/16" tube construction
- Open toe plate
- Durable blue powder coat finish

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
3051-10SR	20X6.5	10x2-3/8 Solid Rubber	1200	65	26x18x48
3051-10MR	20X6.5	10x2 Molded Rubber	1200	65	26x18x48



3051-10SR



3071-10SR

3071

- Baggage handtruck
- Sloped V back design
- Double grip handle
- 1-5/16" tube construction
- Open toe plate
- Durable blue powder coat finish

Parts for 3071:



Wheels for 3071:



♦ **10MR**
10" molded rubber



♦ **10SR**
10" solid rubber

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
3071-10SR	10x13	10x2-3/8 Solid Rubber	1000	57	24x25x50
3071-10MR	10x13	10x2 Molded Rubber	1000	60	24x25x50



2002-8SR

2002

- Bread delivery handtruck
- Double grip loop handle
- 1" x 14 ga. tube construction
- Dual fork toe design/ 19" fork length
- Durable blue powder coat finish

Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
2002-8SR	18x19	8x2 Solid Rubber	600	48	24X28x60
2002-8C	18x19	8x2.5 Cush. Rubber	600	48	25X28x60
2002-8PN	18x19	8x2 Pneumatic	600	49	24X28x60

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ **8SR**
8" solid rubber



♦ **10SR**
10" solid rubber



♦ **8C**
8" cushion rubber



♦ **8PN**
8" pneumatic



♦ **10MR**
10" molded rubber



2003-8SR

2003

- Keg delivery handtruck
- Double grip handle
- 1" x 14 ga. tube construction
- Dual fork toe design
- Single slide bar hook
- Durable blue powder coat finish

Parts for 2003:



Part Number	Toe Plate Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
2003-8SR	14x7	8x2 Solid Rubber	600	30	19x16x49
2003-8C	14x7	8x2.5 Cush. Rubber	600	30	19x16x49



38x76-FSC-5RSX

Flat Stacking Table Caddy

- For stacking regular tables
- 1-1/2" square tube construction
- 1000 lbs. capacity
- Two swivel & two rigid 5"x1-1/4" blue rubber casters
- Durable blue powder coat finish

Part Number	Shipping Size WxLxH (in.)	Weight (lbs.)
38x76-FSC-5RSX	38x76x40	75
38x100-FSC-5RSX	38x100x40	80

Edge Stacking Table Caddy

- Designed to stack 60" diameter tables on their side
- 1" x 14 ga. tube construction
- 800 lb. capacity
- Two swivel & two rigid 5"x1-1/4" blue rubber casters
- Durable blue powder coat finish

Part Number	Shipping Size WxLxH (in.)	Weight (lbs.)
32x49-ESC-5RSX	32x49x38	56



32x49-ESC-5RSX



22x44-DW-5RSX

Drywall Cart

- Heavy duty construction
- 1-5/16" heavy tube construction
- 14 ga. reinforced steel deck
- Two swivel & two rigid casters
- Durable blue powder coat finish

Part Number	Shipping Size WxLxH (in.)	Cart Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
22x44-DW-5RSX	5x1-1/4 Rubber	1000lbs	24x44x47	56
22x44-DW-8PH	8x2 Phenolic	2500lbs	24x44x47	80

Caster Description
For all wheel & caster info & details, please see Section 13.



◆ **5RSX**
5" blue rubber caster



8PH
8" Phenolic

Standard Duty Lumber Cart

- Designed to hold plywood, drywall, tools etc.
- 1-1/2" angle construction
- 14 ga. reinforced steel deck
- 800 lbs. capacity
- Two swivel & two rigid 5"x1-1/4" blue rubber casters
- Durable blue powder coat finish

Part Number	Shipping Size WxLxH (in.)	Weight (lbs.)
24x36-ELT-5RSX	24x36x48	72



24x36-ELT-5RSX



24x36-HLT-6MR

Heavy Duty Lumber Cart

- Designed to hold plywood, drywall, tools etc.
- 1-5/16" x .100 walltube construction
- 14 ga. reinforced steel deck
- 1500 lbs. capacity
- Two swivel & two rigid 6" x 2" rubber casters
- Durable blue powder coat finish

Part Number	Shipping Size WxLxH (in.)	Weight (lbs.)
24x36-HLT-6MR	24x36x48	80

A-Frame Cart

- For handling plywood or any awkward panels or sheets
- 1-1/2" angle construction
- 48" high from deck
- 800 lb. capacity
- Two swivel & two rigid 5"x1-1/4" blue rubber casters
- Durable blue powder coat finish

Heavy Duty A-Frame Cart

- 1-1/2" angle construction
- 52" high from deck
- 2000 lb. capacity
- Two swivel & two rigid 8" molded rubber casters
- Durable blue powder coat finish



24x36-AF-5RSX

Part Number	Cart Capacity (lbs)	Shipping Size WxLxH (in.)	Weight (lbs.)
24x36-AF-5RSX	1000	24x36x55	57
30x42-AF-5RSX	1000	30x42x55	62
36x72-AF-5RSX	1000	36x72x55	83
24x36-AFH-8MR	2000	24x36x62	62
30x42-AFH-8MR	2000	30x42x62	67
36x72-AFH-8MR	2000	36x72x62	88

Caster

Description

For all wheel & caster info & details, please see Section 13.



♦ **5RSX or 6RSX**
5" or 6" blue rubber caster



6MR
6" rubber caster



8MR
8" rubber caster



3048PT-4-5NRPB

Panel Truck

- Ideal for moving large sheet material and long parts
- 1 5/16" round tube construction
- 8-1/4" spaced upright dividers at 30" and 42" off the deck
- 14 ga. reinforced deck
- Standard 6" rubber casters or 5" natural rubber precision bearing casters
- Heavy duty all-welded construction
- 2500 lb. capacity
- Durable blue powder coat finish
- Single Level Panel Truck also available with 30" upright dividers



3060PT-SL-6-6RSX

	Part Number	Deck Size (in.)	Overall Height (in.)	Number of Casters	Weight (lb.)	Capacity (lb.)	Shipping Size WxLxH
Panel Truck	3048PT-4-5NRPB	30x48	53	4	127	2500	31x51x53
	3048PT-4-6RSX	30x48	53	4	127	2500	31x51x54
	3048PT-6-5NRPB	30x48	53	6	134	2500	31x51x53
	3048PT-6-6RSX	30x48	53	6	134	2500	31x51x54
	3060PT-4-5NRPB	30x60	53	4	143	2500	31x63x53
	3060PT-4-6RSX	30x60	53	4	143	2500	31x63x54
	3060PT-6-5NRPB	30x60	53	6	149	2500	31x63x53
	3060PT-6-6RSX	30x60	53	6	149	2500	31x63x54
Single Level Panel Truck	3048PT-SL-4-5NRPB	30x48	41	4	125	2500	31x51x41
	3048PT- SL-4-6RSX	30x48	41	4	125	2500	31x51x42
	3048PT- SL-6-5NRPB	30x48	41	6	132	2500	31x51x41
	3048PT- SL-6-6RSX	30x48	41	6	132	2500	31x51x42
	3060PT- SL-4-5NRPB	30x60	41	4	140	2500	31x63x41
	3060PT- SL-4-6RSX	30x60	41	4	140	2500	31x63x42
	3060PT- SL-6-5NRPB	30x60	41	6	145	2500	31x63x41
	3060PT- SL-6-6RSX	30x60	41	6	145	2500	31x63x42

3024 Steel Drum Dollies

- Designed to move and store 45 gallon drums
- All-welded industrial construction
- 3" flatbar construction on 3024-R and 3024-F only
- 24" inner diameter
- Four 3" polyolefin swivel casters
- Durable blue powder coat finish

Part Number	Caster Size (in.) & Type	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
3024	3x1.25 Polyolefin	1000	25x25X7	11
♦ 3024-R	3x1.25 Polyolefin	1000	25x25X7	17
♦ 3024-F	3x1.25 Polyolefin	1000	25x25X7	16

Caster Description

For all wheel & caster info & details, please see Section 13.



3PO
3"
polyolefin casters



4PH
4" phenolic caster

Angle Frame Dollies

- 1-1/2" angle frame construction
- Four 4" phenolic swivel casters
- Durable blue powder coat finish

Part Number	Caster Size (in.) & Type	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
18x18-AFD-4PH	4x1.5 Phenolic	1200	18x18x6	19
18x24-AFD-4PH	4x1.5 Phenolic	1200	18x24x6	20
24x24-AFD-4PH	4x1.5 Phenolic	1200	24x24x6	22

Steel Deck Dollies

- 14 ga. reinforced steel deck
- Four 4" phenolic swivel casters
- OPTION: SDDH - Handle sold separately
- Durable blue powder coat finish

Part Number	Caster Size (in.) & Type	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
18x18-SDD-4PH	4x1.5 Phenolic	1200	18x18x8	24
18x24-SDD-4PH	4x1.5 Phenolic	1200	18x24x8	28
24x24-SDD-4PH	4x1.5 Phenolic	1200	24x24x8	32
SDDH handle	—	—	10.5x4x34	3

SDDH

Aluminum Deck Dollies

- 3/8" tread plate construction
- Four 4" phenolic swivel casters
- Mill finish

Part Number	Caster Size (in.) & Type	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
18x18-ADD-4PH	4x1.5 Phenolic	1200	18x18x8	21
18x24-ADD-4PH	4x1.5 Phenolic	1200	18x24x8	25
24x24-ADD-4PH	4x1.5 Phenolic	1200	24x24x8	31

3002 Drum Upender

- 1" x 14 ga. heavy wall tubing construction
- All welded design
- Durable blue powder coat finish

Part Number	Shipping Size WxLxH (in.)	Weight (lbs.)
3002	6x1X50	15

♦ Stock item

3000 Self Stander Drum Truck

- Space saving design
- Double grip handle
- 1-5/16" tube construction
- Durable blue powder coat finish

Parts for 3000:



Part Number	Wheel Size (in.) & Type	Capacity (lbs.)	Shipping Size WxDxH (in.)	Weight (lbs.)
♦3000-10SR	10x2 solid rubber	1000	25x22x62	47
♦3000-10MR	10X2.5 molded rubber	1000	26x22x62	65

Wheel Description

For all wheel & caster info & details, please see Section 13.



10SR
10" solid rubber wheel



8MR or 10MR
8" or 10" molded rubber wheel



8PO
8" polyolefin wheel

3001 Standard Drum Truck

- Double grip handle
- Heavy duty tube construction
- Durable blue powder coat finish

Parts for 3001:



Part Number	Wheel Size (in.) & Type	Capacity (lbs.)	Shipping Size WxDxH (in.)	Weight (lbs.)
♦ 3001-10SR	10x2 Solid rubber	1000	25x25x60	40
♦ 3001-10MR	10X2.5 Molded Rubber	1000	26x25x60	58

3004 Pallet Loader Drum Truck

- Load and offload pallets
- Double grip handle
- Durable blue powder coat finish

Parts for 3004:



Part Number	Wheel Size (in.) & Type	Capacity (lbs.)	Shipping Size WxDxH (in.)	Weight (lbs.)
♦ 3004-10SR	10x2 Solid rubber	1400	25x35x54	55
♦ 3004-10MR	10x2.5 Molded Rubber	1400	26x35x54	75

Wheel Description

For all wheel & caster info & details, please see Section 13.



6SR
6" solid rubber wheel



6MR
6" molded rubber wheel

3005 Dispenser Mover Drum Truck

- For most steel drums
- Loop handle
- Designed to dispense barrel into 5 gallon pail
- Durable blue powder coat finish

Part Number	Caster Size (in.) & Type	Capacity (lbs.)	Shipping Size WxDxH (in.)	Weight (lbs.)
3005-8PO	8x2 Polyolefin	1000	20x39x64	57
3005-8MR	8x2 Molded Rubber	1000	20x39x64	68



3003 Open Drum Truck

- For 45 gallon drums
- Easy loading low profile frame
- T-bar pull handle
- Two 8" solid rubber wheels and one 5" swivel rubber caster
- Durable blue powder coat finish

Parts for 3003:



◆ **GH1.25**
Grip Handle,
1.25" ID

Part Number	Caster/Wheel Size (in.) & Type	Capacity (lbs.)	Shipping Size WxDxH (in.)	Weight (lbs.)
◆ 3003	8x2 Solid Rubber + 5x1.25 Rubber Caster	1000	24x32x41	34

Wheel/Caster Description

For all wheel & caster info & details, please see Section 13.



◆ **8SR**
6" or 8" solid rubber wheel



5MR
5" molded rubber caster



3PO
3" polyolefin wheel



2-1/2" solid rubber swivel caster



3014 Drum Rocker

- Economical and safe method of upending, moving or dispensing steel drums
- Four 3" polyolefin wheels
- Durable blue powder coat finish



3014-SW

3014-SW Swivel Drum Rocker

- Economical and safe method of upending, moving or dispensing steel drums
- Two 3" polyolefin wheels and two swivel 2.5" rubber casters
- Durable blue powder coat finish

Parts for 3014:



◆ **GH1.25**
Grip Handle,
1.25" ID

Part Number	Wheel Size (in.) & Type	Capacity (lbs.)	Shipping Size WxDxH (in.)	Weight (lbs.)
◆ 3014	3" polyolefin	1000	38x21x20	25
◆ 3014-SW	2.5 swivel rubber & 3" polyolefin	1000	38x21x20	25



950-8SR

950 Single Cylinder Cart

- Loop handle
- Roller stairclimbers
- 1" x 16 ga. tube construction
- Durable blue powder coat finish

Part Number	Toe Plate Size WxD (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
950-8SR	8.5x10	8x2 Solid Rubber	200	35	16x14x44

CC1 Single Cylinder Cart

- Loop handle
- 1" x 16 ga. tube construction
- Durable blue powder coat finish

Part Number	Toe Plate Size WxD (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
♦ CC1-8SR	10x8.5	8x2 Solid Rubber	200	23	16x14x44

CC2 Double Cylinder Cart

- Single grip handle
- 1" x 16 ga. tube construction
- Durable blue powder coat finish

Parts for CC2:



Part Number	Toe Plate Size WxD (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
CC2-6SR	16.75x8.5	6x2 Solid Rubber	200	17	23x14x42

CC1-8SR

CC2-6SR

CC3 Double Cylinder Cart

- Loop handle
- Tool tray
- 1" x 16 ga. tube construction
- Durable blue powder coat finish

Part Number	Toe Plate Size WxD (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
♦ CC3-8SR	15.5x10.5	8x2 Solid Rubber	200	28	18x25x45

CC3-8SR

CC4 Double Cylinder Cart

- Loop handle
- Tool tray
- 1" x 16 ga. tube construction
- Durable blue powder coat finish

Part Number	Toe Plate Size WxD (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
♦ CC4-8SR	16.5x9	8x2 Solid Rubber	200	28	24x20x37

CC4-8SR

CC5-16PN

CC5 Double Cylinder Cart

- Loop handle
- Tool tray
- 1" x 16 ga. tube construction
- Durable blue powder coat finish

Part Number	Toe Plate Size WxD (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
♦ CC5-14C	25x13.5	14x3 Cushion Rubber	300	58	35x25x43
CC5-16PN	25x13.5	16x3 Pneumatic	300	55	35x25x43

CC5-14C

Wheel Description

For all wheel & caster info & details, please see Section 13.



6SR or ♦ 8SR
6" or 8" solid rubber wheel



14C
14" cushion rubber wheel



16PN
16" pneumatic wheel



701-10PN

701 Heavy Duty Single Cylinder Cart

- Loop handle
- 1" x 14 ga. tube construction
- Durable blue powder coat finish

Part Number	Toe Plate Size WxD (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
♦ 701-10PN	14x7	10x3 Pneumatic	600	27	21x17x48



702-10PN

702 Heavy Duty Single Cylinder Cart

- Loop handle
- Fold-out rear leg with single 2-1/2" swivel caster
- 1" x 14 ga. tube construction
- Durable blue powder coat finish

Part Number	Toe Plate Size WxD (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
702-10PN	14x7	10x3 Pneumatic	600	34	21x17x48



703-10PN

703 Heavy Duty Single Cylinder Cart

- Loop handle
- Fold-out rear leg with double 2-1/2" swivel caster
- 1" x 14 ga. tube construction
- Durable blue powder coat finish

Part Number	Toe Plate Size WxD (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
703-10PN	14x7	10x3 Pneumatic	600	35	21x17x48

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ 10PN
10" pneumatic wheel



2.5SR
2-1/2" solid rubber
swivel caster



MC3-8SR

MC3 Light Duty Single Cylinder Cart

- Loop handle
- Fold-out rear leg with single 2-1/2" swivel caster
- 1" x 16 ga. tube construction
- Durable blue powder coat finish

MC4 Light Duty Single Cylinder Cart

- Loop handle
- Fold-out rear leg with double 2-1/2" swivel caster
- 1" x 16 ga. tube construction
- Durable blue powder coat finish



MC4-8SR

Part Number	Toe Plate Size WxD (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxDxH (in.)
MC3-8SR	10x8-1/2	8x2 Solid Rubber	200	24	16x14x44
MC4-8SR	10x8-1/2	8x2 Solid Rubber	200	25	16x14x44



GCLC-K

GCLC-K Swift-Lift Gas Cylinder Lift Cart

- Safely and efficiently transport your gas cylinders
- For use with "K" size bottles (9" - 10" dia.)
- Heavy duty all-welded construction
- Ergonomically balanced for easy transport
- Low maintenance mechanical winch device
- Mount and dismount on welding machines
- Provides 18" lift
- For indoor or outdoor use
- Eliminate back, shoulder and knee strain injuries
- Durable blue powder coat finish



Part Number	Wheel Size (in.) & Type	Shipping Size WxDxH (in.)	Weight (lbs.)
GCLC-K	15x3 solid rubber wheels	21x27x43	100

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ **8SR**
8" solid rubber wheel



2.5SR
2-1/2" solid rubber swivel caster



14C
14" cushion rubber



16PN
16" pneumatic

Firewalled Cylinder Cart

- For safe and secure cylinder transport
- 2 cylinder capacity with safety chains for secure transport
- Centre fire-rated wall complies with OSHA 1926.350 and OSHA 1910.253
- Integrated lifting lug
- Heavy duty all-welded 16 ga. steel construction with 1" diameter tube
- Durable blue powder coat finish



CC5-FW-LL- 14C

Part Number	Overall Height (in.)	Weight (lb.) & Type	Wheel Type (lbs.)	Shipping Size WxLxH (in.)
CC5-FW-LL-14C	65	80	14"	27x25x65
CC5-FW-LL-16PN	65	80	16"	27x25x65

Two-Shelf Service Carts

- 14 ga. steel trays with 1-1/2" lips up (option: lips down)
- 1-1/2" x 1-1/2" x 1/8" angle corner posts
- Heavy duty all-welded construction
- Two swivel and two rigid casters
- 1" diameter tube push handle on swivel end
- 25-7/8" clearance between shelves
- Durable blue powder coat finish

OPTIONS:

- ~ Locking swivel casters
 - ~ Ergonomic handle
- Please call for details.*



24x36SC2-5RSX

Part Number	Shelf Size (in.)	Overall Height (in.)	Caster Size/Type			Weight (lbs.)	Capacity (lbs.)
			5" Rubber	8" Pneumatic	10" Pneumatic		
16x30SC2-5RSX	16x30	35	•			51	1000
18x24SC2-5RSX	18x24	35	•			48	1000
18x30SC2-5RSX	18x30	35	•			52	1000
18x36SC2-5RSX	18x36	35	•			60	1000
20x36SC2-5RSX	20x36	35	•			64	1000
20x36SC2-8PN	20x36	39		•		81	1200
20x43SC2-5RSX	20x43	35	•			70	1000
20x43SC2-8PN	20x43	39		•		87	1200
♦24x36SC2-5RSX	24x36	35	•			75	1000
24x36SC2-8PN	24x36	39		•		88	1200
24x36SC2-10PN	24x36	42			•	92	1500
24x42SC2-5RSX	24x42	35	•			80	1000
24x42SC2-8PN	24x42	39		•		94	1200
24x42SC2-10PN	24x42	42			•	98	1500
24x48SC2-5RSX	24x48	35	•			84	1000
24x48SC2-8PN	24x48	39		•		101	1200
24x48SC2-10PN	24x48	42			•	105	1500
30x60SC2-5RSX	30x60	35	•			118	1000
30x60SC2-8PN	30x60	39		•		133	1200
30x60SC2-10PN	30x60	42			•	137	1500

Extra Heavy Duty Two-Shelf Service Carts

Same as above with the following upgrades:

- 2" x 2" x 3/16" angle corner posts
- Two swivel and two rigid casters, phenolic or cast iron casters for easy rolling over small objects or cables
- Durable blue powder coat finish



24x36SCHD2-6PH

OPTIONS:

- ~ Locking swivel casters
 - ~ Ergonomic handle
- Please call for details.*

Part Number	Shelf Size (in.)	Overall Height (in.)	Caster Size & Type		Weight (lbs.)	Capacity (lbs.)
			6" Phenolic	6" Cast Iron		
24x36SCHD2-6PH	24x36	37	•		96	2000
24x36SCHD2-6CI	24x36	37		•	101	2000
24x48SCHD2-6PH	24x48	37	•		110	2000
24x48SCHD2-6CI	24x48	37		•	115	2000
30x60SCHD2-6PH	30x60	37	•		126	2000
30x60SCHD2-6CI	30x60	37		•	131	2000

Caster Description

For all wheel & caster info & details, please see Section 13.



♦ 5RSX
5" rubber caster



8PN or 10PN
8" or 10" pneumatic caster



6PH
6" phenolic caster



6CI
6" cast iron caster

Three-Shelf Service Carts

- 14 ga. steel trays with 1-1/2" lips up (option: lips down)
- 1-1/2" x 1-1/2"x 1/8" angle corner posts
- Heavy duty all-welded construction
- Two swivel and two rigid casters
- 1" diameter tube push handle on swivel end
- 12-1/8" clearance between shelves
- Durable blue powder coat finish

OPTIONS:

- ~ Locking swivel casters
 - ~ Ergonomic handle
- Please call for details.*



18x30SC3-5RSX

Part Number	Shelf Size (in.)	Overall Height (in.)	Caster Size/Type			Weight (lbs.)	Capacity (lbs.)
			5" Rubber	8" Pneumatic	10" Pneumatic		
16x30SC3-5RSX	16x30	35	•			66	1000
18x24SC3-5RSX	18x24	35	•			61	1000
18x30SC3-5RSX	18x30	35	•			68	1000
18x36SC3-5RSX	18x36	35	•			79	1000
20x36SC3-5RSX	20x36	35	•			85	1000
20x36SC3-8PN	20x36	39		•		102	1200
20x43SC3-5RSX	20x43	35	•			94	1000
20x43SC3-8PN	20x43	39		•		111	1200
24x36SC3-5RSX	24x36	35	•			94	1000
24x36SC3-8PN	24x36	39		•		112	1200
24x36SC3-10PN	24x36	42			•	116	1500
24x42SC3-5RSX	24x42	35	•			108	1000
24x42SC3-8PN	24x42	39		•		125	1200
24x42SC3-10PN	24x42	42			•	129	1500
24x48SC3-5RSX	24x48	35	•			116	1000
24x48SC3-8PN	24x48	39		•		132	1200
24x48SC3-10PN	24x48	42			•	136	1500
30x60SC3-5RSX	30x60	35	•			164	1000
30x60SC3-8PN	30x60	39		•		180	1200
30x60SC3-10PN	30x60	42			•	184	1500

Extra Heavy Duty Three-Shelf Service Carts

Same as above with the following upgrades:

- 2" x 2"x 3/16" angle corner posts
- Two swivel and two rigid casters
- Durable blue powder coat finish



24x36SCHD3-6PH

OPTIONS:

- ~ Locking swivel casters
 - ~ Ergonomic handle
- Please call for details.*

Part Number	Shelf Size (in.)	Overall Height (in.)	Caster Size & Type		Weight (lbs.)	Capacity (lbs.)
			6" Phenolic	6" Cast Iron		
24x36SCHD3-6PH	24x36	37	•		120	2000
24x36SCHD3-6CI	24x36	37		•	101	2000
24x48SCHD3-6PH	24x48	37	•		141	2000
24x48SCHD3-6CI	24x48	37		•	115	2000
30x60SCHD3-6PH	30x60	37	•		165	2000
30x60SCHD3-6CI	30x60	37		•	131	2000

Caster Description

For all wheel & caster info & details, please see Section 13.



5RSX
5" rubber caster



8PN or 10PN
8" or 10" pneumatic caster



6PH
6" phenolic caster



6CI
6" cast iron caster

Four-Shelf Service Carts

- 14 ga. steel trays with 1-1/2" lips up (option: lips down)
- 1-1/2" x 1-1/2" x 1/8" angle corner posts
- Heavy duty all-welded construction
- Two swivel and two rigid casters
- 1" diameter tube push handle on swivel end
- 16-1/8" clearance between shelves
- Durable blue powder coat finish

OPTIONS:

- ~ Locking swivel casters
- ~ Ergonomic handle
Please call for details.



18x30SC4-5RSX

Part Number	Shelf Size (in.)	Overall Height (in.)	Caster Size/Type			Weight (lbs.)	Capacity (lbs.)
			5" Rubber	8" Pneumatic	10" Pneumatic		
18x30SC4-5RSX	18x30	61	•			97	1000
18x36SC4-5RSX	18x36	61	•			109	1000
20x36SC4-5RSX	20x36	61	•			117	1000
20x36SC4-8PN	20x36	65		•		145	1200
20x43SC4-5RSX	20x43	61	•			129	1000
20x43SC4-8PN	20x43	65		•		156	1200
24x36SC4-5RSX	24x36	61	•			129	1000
24x36SC4-8PN	24x36	65		•		156	1200
24x36SC4-10PN	24x36	68			•	160	1500
24x42SC4-5RSX	24x42	61	•			138	1000
24x42SC4-8PN	24x42	65		•		165	1200
24x42SC4-10PN	24x42	68			•	169	1500
24x48SC4-5RSX	24x48	61	•			157	1000
24x48SC4-8PN	24x48	65		•		184	1200
24x48SC4-10PN	24x48	68			•	188	1500
30x60SC4-5RSX	30x60	61	•			221	1000
30x60SC4-8PN	30x60	65		•		248	1200
30x60SC4-10PN	30x60	68			•	252	1500

Five-Shelf Service Carts

Part Number	Shelf Size (in.)	Overall Height (in.)	Caster Size/Type			Weight (lbs.)	Capacity (lbs.)
			5" Rubber	8" Pneumatic	10" Pneumatic		
18x30SC5-5RSX	18x30	61	•			113	1000
18x36SC5-5RSX	18x36	61	•			128	1000
20x36SC5-5RSX	20x36	61	•			138	1000
20x36SC5-8PN	20x36	65		•		165	1200
20x43SC5-5RSX	20x43	61	•			153	1000
20x43SC5-8PN	20x43	65		•		180	1200
24x36SC5-5RSX	24x36	61	•			153	1000
24x36SC5-8PN	24x36	65		•		180	1200
24x36SC5-10PN	24x36	68			•	184	1500
24x42SC5-5RSX	24x42	61	•			170	1000
24x42SC5-8PN	24x42	65		•		197	1200
24x42SC5-10PN	24x42	68			•	201	1500
24x48SC5-5RSX	24x48	61	•			188	1000
24x48SC5-8PN	24x48	65		•		215	1200
24x48SC5-10PN	24x48	68			•	219	1500
30x60SC5-5RSX	30x60	61	•			268	1000
30x60SC5-8PN	30x60	65		•		295	1200
30x60SC5-10PN	30x60	68			•	299	1500

24x36SC5-5RSX

- 14 ga. steel trays with 1-1/2" lips up (option: lips down)
- 1-1/2" x 1-1/2" x 1/8" angle corner posts
- Heavy duty all-welded construction
- Two swivel and two rigid casters
- 1" diameter tube push handle on swivel end
- 11-3/4" clearance between shelves
- Durable blue powder coat finish

OPTIONS:

- ~ Locking swivel casters
- ~ Ergonomic handle
Please call for details.



OC – Order Carts

- These carts help keep loose papers organized with sloped shelf on front of cart.
- Available with two (OC2) or three (OC3) shelves
- 14 ga. steel trays with 1-1/2" lips up (option: lips down)
- Heavy duty all-welded construction
- Two swivel and two rigid 5" x 1-1/4" blue rubber non-marking casters (5RSX)
- Push handle on swivel end
- 24" x 12" deep paper holder
- 24-3/4" clearance between shelves on 2-shelf unit, 12-1/4" clearance between shelves on 3-shelf unit
- Durable blue powder coat finish



24x36OC3-5RSX

2-Shelf Model Part Number	Shelf Size (in.)	Overall Height (in.)	Caster Type & Size	Weight (lbs.)	Capacity (lbs.)
16x30OC2-5RSX	16x30	35	2 rigid & 2 swivel 5 x 1-1/4 RSX Rubber Casters	61	1000
18x24OC2-5RSX	18x24	35		57	1000
18x30OC2-5RSX	18x30	35		63	1000
18x36OC2-5RSX	18x36	35		69	1000
20x36OC2-5RSX	20x36	35		73	1000
24x36OC2-5RSX	24x36	35		79	1000
24x42OC2-5RSX	24x42	35		88	1000
24x48OC2-5RSX	24x48	35		93	1000

3-Shelf Model Part Number	Shelf Size (in.)	Overall Height (in.)	Caster Type & Size	Weight (lbs.)	Capacity (lbs.)
16x30OC3-5RSX	16x30	35	2 rigid & 2 swivel 5 x 1-1/4 RSX Rubber Casters	76	1000
18x24OC3-5RSX	18x24	35		70	1000
18x30OC3-5RSX	18x30	35		79	1000
18x36OC3-5RSX	18x36	35		88	1000
20x36OC3-5RSX	20x36	35		93	1000
24x36OC3-5RSX	24x36	35		104	1000
24x42OC3-5RSX	24x42	35		116	1000
24x48OC3-5RSX	24x48	35		124	1000

Caster Description

For all wheel & caster info & details, please see Section 13.



♦ 5RSX
5" rubber caster

UC – Utility Carts

- Available with two or three shelves
- 14 ga. steel trays with 1-1/2" lips up (option: lips down)
- Heavy duty all-welded construction
- 1" x 14 ga. tube handle and posts
- Two swivel and two rigid 5" x 1-1/4" blue rubber non-marking casters (5RSX)
- 26" between shelves on UC2 and 12-1/4" between shelves on the UC3
- Durable blue powder coat finish



24x36UC3-5RSX

2-Shelf Model Part Number	Shelf Size (in.)	Overall Height (in.)	Caster Type & Size	Weight (lbs.)	Capacity (lbs.)
18x30UC2-5RSX	18x30	40	2 rigid & 2 swivel	52	800
24x36UC2-5RSX	24x36	40	5 x 1-1/4 RSX	69	800
24x48UC2-5RSX	24x48	40	Rubber Casters	83	800

3-Shelf Model Part Number	Shelf Size (in.)	Overall Height (in.)	Caster Type & Size	Weight (lbs.)	Capacity (lbs.)
18x30UC3-5RSX	18x30	40	2 rigid & 2 swivel	68	800
24x36UC3-5RSX	24x36	40	5 x 1-1/4 RSX	93	800
24x48UC3-5RSX	24x48	40	Rubber Casters	114	800

FAS – Fold-Away Shelf Carts

- 8" wide x 13" deep fold away shelf
- 18" wide x 47" deep steel deck
- Complete with small tray for pens and miscellaneous items
- Heavy duty all-welded construction
- Non-marking rubber corner bumpers
- Two swivel and two rigid 5" x 1-1/4" blue rubber non marking casters (5RSX)
- 36" overall height
- Durable blue powder coat finish

OPTIONS:

- ~ Locking swivel casters
- Please call for details.*

Part Number	Caster/Wheel Size (in.) & Type	Cart Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
18x47FAS-5RSX	5x1.25 Rubber Caster	1000	18x54x36	70



RST–Removable Shelf Carts

- Heavy duty 2-in-1 shelf truck
- Top shelf removes to convert to a platform truck
- Heavy duty all-welded construction
- Non-marking rubber corner bumpers
- Two swivel and two rigid 5" x 1-1/4" blue rubber non-marking casters (5RSX)
- 33" top shelf height
- 41" overall height
- Durable blue powder coat finish

OPTIONS:

- ~ Locking swivel casters
- Please call for details.*



24x36RST-5RSX without shelf

24x36RST-5RSX with shelf

Caster Description

For all wheel & caster info & details, please see Section 13.



◆ **5RSX**
5" rubber caster



6PH
6" phenolic caster

ST– Low Profile Shop Trucks

- Two-tier shop truck
- 14 ga. reinforced decks, lips down
- Layback push handle
- Heavy duty all-welded construction
- Two swivel and two rigid casters
- 25-1/2" top shelf height
- 36" overall height
- Durable blue powder coat finish



OPTIONS:

- ~ Locking swivel casters
- Please call for details.*

Part Number	Shelf Size (in.)	Wheel Size (in.) & Type	Cart Capacity (lbs.)	Weight (lbs.)	Shipping Size WxLxH (in.)
18x30-ST-5RSX	18x30	5x1.25 RSX Rubber	1000	50	18x30x36
24x36-ST-5RSX	24x36	5x1.25 RSX Rubber	1000	66	24x36x36
24x48-ST-5RSX	24x48	5x1.25 RSX Rubber	1000	80	24x48x36
24x60-ST-5RSX	24x60	5x1.25 RSX Rubber	1000	96	24x60x36
30x48-ST-5RSX	30x48	5x1.25 RSX Rubber	1000	99	30x48x36
30x60-ST-5RSX	30x60	5x1.25 RSX Rubber	1000	113	30x60x36
36x60-ST-5RSX	36x60	5x1.25 RSX Rubber	1000	129	36x60x36
36x72-ST-5RSX	36x72	5x1.25 RSX Rubber	1000	150	36x72x36
18x30-ST-6PH	18x30	6x2 Phenolic	2000	64	18x30x38
24x36-ST-6PH	24x36	6x2 Phenolic	2000	80	24x36x38
24x48-ST-6PH	24x48	6x2 Phenolic	2000	94	24x48x38
24x60-ST-6PH	24x60	6x2 Phenolic	2000	110	24x60x38
30x48-ST-6PH	30x48	6x2 Phenolic	2000	108	30x48x38
30x60-ST-6PH	30x60	6x2 Phenolic	2000	127	30x60x38
36x60-ST-6PH	36x60	6x2 Phenolic	2000	143	36x60x38
36x72-ST-6PH	36x72	6x2 Phenolic	2000	164	36x72x38



24x42MS

MS- Machine Stands

- Use as a work table or machinery stand
- 14 ga. reinforced steel construction shelves
- 1-1/2" x 1-1/2" x 1/8" angle corner posts
- 1-1/2" lips down on both shelves
- 32" overall height
- Bolt down foot plates on all legs
- 1500 lbs. capacity
- Durable blue powder coat finish

Part Number	Shelf Size (in.)	Weight (lbs.)	Shipping Size WxLxH (in.)
18x24MS	18x24	40	18x24x32
18x30MS	18x30	45	18x30x32
18x36MS	18x36	51	18x36x32
20x36MS	20x36	51	20x36x32
24x36MS	24x36	62	24x36x32
24x42MS	24x42	69	24x42x32
24x48MS	24x48	72	24x48x32

Tool Cart (Extra Heavy Duty)

- 4 shelf security cart
- Suitable for Millwright, Mechanic, Fabricator, Construction
- All-welded construction
- Two swivel and two rigid 6" phenolic casters
- Double lockable door (padlock not included)
- Hooks and pockets on either end to hang clamps, tools, squares, levels, grinders
- 4" tool tray on inside of both doors
- Durable blue powder coat finish

Part Number	Wheel Siz (in.) & Type	Shelf Size (in.)	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
24x36TC4-6PH	6" Phenolic	24x36	3600	26x46x38	210



24x36TC4-6PH



24x36TC4-6PH



24x36TC4-6PH

SM1853 – Quick Turn Stock Cart



SM1853-5RSX

- 1" x 16 ga. round tubing design
- Four 5" x 1-1/4" blue rubber swivel non-marking casters
- 8" x 2" solid rubber centre load wheels
- Heavy duty all-welded construction
- 10-1/2" deck height
- Durable blue powder coat finish

Part Number	Wheel Size (in.) & Type	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
SM1853-5RSX	5x1.25 blue rubber & 8x2 solid rubber	1000	18x53x36	60



H5B-5RSX

H5B – High Deck Stock Cart

- 1" x 16 ga. round tubing design
- Two swivel and two rigid 5" x 1-1/4" blue rubber non-marking casters
- Heavy duty all-welded construction
- 26" deck height
- Durable blue powder coat finish

Part Number	Wheel Size (in.) & Type	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
H5B-5RSX	5x1.25 blue rubber	800	16x36x36	35

Caster Description

For all wheel & caster info & details, please see Section 13.



♦ **5RSX**
5" blue rubber
caster



♦ **8SR**
8" solid rubber
wheel



L5B-5RSX

L5B – Low Deck Stock Cart

- 1" x 16 ga. round tubing design
- Two swivel and two rigid 5" x 1-1/4" blue rubber non-marking casters
- Heavy duty all-welded construction
- 12" deck height
- Durable blue powder coat finish

Part Number	Wheel Size (in.) & Type	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
L5B-5RSX	5x1.25 blue rubber	800	16x36x36	30



LT5B-5RSX

LT5B – Solid Deck Stock Cart

- 1" x 16 ga. round tubing design
- 14 ga. solid top measuring 18" x 36"
- Two swivel and two rigid 5" x 1-1/4" blue rubber non-marking casters
- Heavy duty all-welded construction
- 28" deck height
- Durable blue powder coat finish

Part Number	Wheel Size (in.) & Type	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
LT5B-5RSX	5x1.25 blue rubber	800	18x36x28	40


Caster Description
For all wheel & caster info & details, please see Section 13.



♦ **5RSX**
5" blue rubber caster

Library Cart

- Two sloped shelves for ease of transportation and access of books
- Heavy duty all-welded construction
- Two swivel and two rigid 5" x 1-1/4" blue rubber non-marking casters
- Non-marking rubber corner bumpers
- Durable blue powder coat finish

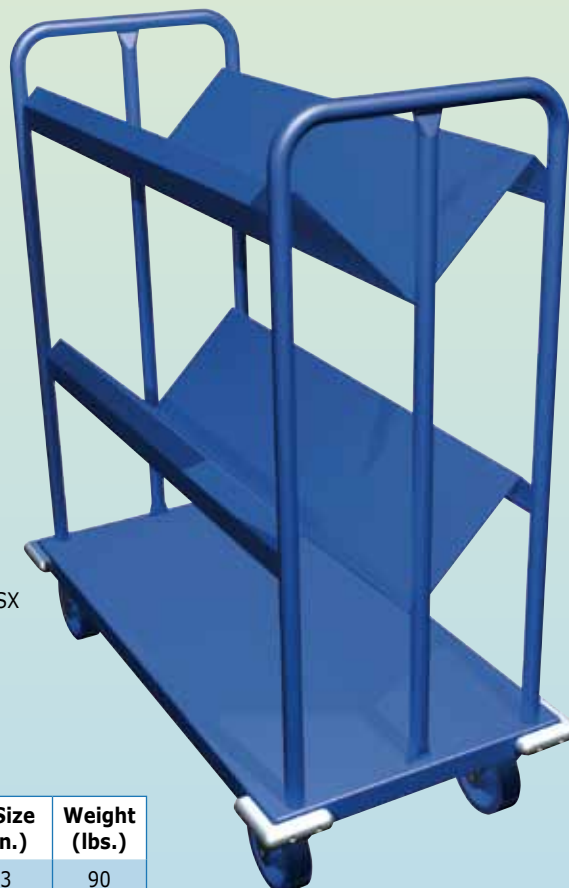

LC-5RSX

Part Number	Wheel Size (in.) & Type	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
LC-5RSX	5x1.25 blue rubber	600	18x37x43	90

Pick and transport material without the need for a separate ladder.



Two Shelf Stock Picker

- 14 ga. steel construction with 1" diameter tube
- Spring-loaded ladder locks to floor when weight is applied
- Two swivel and two rigid 5"x1-1/4" blue rubber non-marking casters (5RSX)
- Heavy duty all-welded construction
- Durable blue powder coat finish

Shelf Sizes:

Top 24"W x 36"L
Bottom 24"W x 43"L

Caster Description

For all wheel & caster info & details, please see Section 13.



♦ **5RSX**
5" blue rubber casters

Three Shelf Stock Picker

- 14 ga. steel construction with 1" diameter tube
- Spring-loaded ladder locks to floor when weight is applied
- Two swivel and two rigid 5"x1-1/4" blue rubber non-marking casters (5RSX)
- Heavy duty all-welded construction
- Durable blue powder coat finish

Shelf Sizes:

Top 24"W x 36"L
Middle 24"W x 39-1/2"L
Bottom 24"W x 43"L



Parts for 362 & 363:

♦ **GG:** Grey Glide



Part Number	# of Shelves	Shelf Clearance (in.)	# of Stairs	Capacity (lbs.)	Weight (lbs.)	Shipping Size WxLxH (in.)
24x36-362-5RSX	2	25-7/8	3	1000	108	24x54x60
24x36-363-5RSX	3	12-1/8	3	1000	132	24x54x60

Pick and transport material without the need for a separate ladder.

Three Shelf High Duty Stock Picker

- 14 ga. steel construction with 1" diameter tube
- 5-step spring-loaded ladder locks to floor when weight is applied
- Two swivel and two rigid 5"x1-1/4" blue rubber non-marking casters (5RSX)
- Heavy duty all-welded construction
- 20"W x 12"D 14 ga. removable top shelf
- Durable blue powder coat finish

Shelf Sizes:

Top 20"W x 43"L
Middle 20"W x 46-1/2"L
Bottom 20"W x 50"L



Caster Description

For all wheel & caster info & details, please see Section 13.



♦ **5RSX**
5" blue rubber casters

Three Shelf High Platform Stock Picker

- Slanted shelf design
- 14 ga. steel construction with 1" diameter tube
- Spring-loaded ladder locks to floor when weight is applied
- Two swivel and two rigid 5"x1-1/4" blue rubber non-marking casters (5RSX)
- Heavy duty all-welded construction
- Durable blue powder coat finish

Shelf Sizes:

Top 20"W x 29"L
Middle 20"W x 36"L
Bottom 20"W x 43"L



Parts for 363H & 364:

♦ **GG:** Grey Glide



Part Number	# of Shelves	Shelf Clearance (in.)	# of Stairs	Capacity (lbs.)	Weight (lbs.)	Shipping Size WxLxH (in.)
20x43-363H-5RSX	3	12-1/8	5	1000	100	20x60x79
20x43-364-5RSX	3	27-7/8	5	1000	100	20x60x79

SDL – Light Duty Platform Trucks

- Economical steel deck platform truck
- 14 ga. reinforced deck
- 1" diameter push handle welded on swivel end
- Two swivel and two rigid 4" casters
- 600 lbs. capacity
- Heavy duty welded construction
- Durable blue powder coat finish



18x36-SDL-4RSX

Part Number	Deck Size (in.) WxLxH	Overall Height (in.)	Caster Size / Type			Weight (lbs.)	Capacity (lbs.)	Shipping Size WxLxH
			4" Rubber	4" Phenolic				
18x36-SDL-4RSX	18x36x6-1/2	33	•			37	600	18x36x10
18x36-SDL-4PHL	18x36x6-1/2	33		•		37	600	18x36x10
20x36-SDL-4RSX	20x36x6-1/2	33	•			40	600	20x36x10
20x36-SDL-4PHL	20x36x6-1/2	33		•		40	600	20x36x10
20x43-SDL-4RSX	20x43x6-1/2	33	•			43	600	20x43x10
20x43-SDL-4PHL	20x43x6-1/2	33		•		43	600	20x43x10
24x36-SDL-4RSX	24x36x6-1/2	33	•			45	600	24x36x10
24x36-SDL-4PHL	24x36x6-1/2	33		•		45	600	24x36x10
24x48-SDL-4RSX	24x48x6-1/2	33	•			51	600	24x48x10
24x48-SDL-4PHL	24x48x6-1/2	33		•		51	600	24x48x10
24x60-SDL-4RSX	24x60x6-1/2	33	•			59	600	24x60x10
24x60-SDL-4PHL	24x60x6-1/2	33		•		59	600	24x60x10

Caster Descriptions

For all wheel & caster info & details, please see Section 13



4RSX
4" rubber
caster



5RSX
5" rubber
caster



4PH
4" phenolic
caster



5PH
5" phenolic
caster



5PUL
5" polyurethane
caster

SD – Medium Duty Platform Trucks

- Medium duty steel deck platform truck
- 14 ga. reinforced deck
- Removable 1-5/16" diameter tube handle which fits on either end
- Two swivel and two rigid 5" casters
- Casters bolted on
- 1200 lbs. capacity
- Heavy duty welded construction
- Durable blue powder coat finish



24x48-SD-5RSX

Part Number	Deck Size (in.) WxLxH	Overall Height (in.)	Caster Size / Type			Weight (lbs.)	Capacity (lbs.)	Shipping Size WxLxH
			5" Rubber	5" Phenolic	5" Poly Urethane			
♦ 24x36-SD-5RSX	24x36x8-3/4	35	•			57	1200	24x40x14
24x36-SD-5PHL	24x36x8-3/4	35		•		57	1200	24x40x14
24x36-SD-5PUL	24x36x8-3/4	35			•	57	1200	24x40x14
♦ 24x48-SD-5RSX	24x48x8-3/4	35	•			67	1200	24x52x14
24x48-SD-5PHL	24x48x8-3/4	35		•		67	1200	24x52x14
24x48-SD-5PUL	24x48x8-3/4	35			•	67	1200	24x52x14
24x60-SD-5RSX	24x60x8-3/4	35	•			77	1200	24x64x14
24x60-SD-5PHL	24x60x8-3/4	35		•		77	1200	24x64x14
24x60-SD-5PUL	24x60x8-3/4	35			•	77	1200	24x64x14
♦ 30x48-SD-5RSX	30x48x9-1/4	36	•			77	1200	30x52x14
30x48-SD-5PHL	30x48x9-1/4	36		•		77	1200	30x52x14
30x48-SD-5PUL	30x48x9-1/4	36			•	77	1200	30x52x14
♦ 30x60-SD-5RSX	30x60x9-1/4	36	•			92	1200	30x64x14
30x60-SD-5PHL	30x60x9-1/4	36		•		92	1200	30x64x14
30x60-SD-5PUL	30x60x9-1/4	36			•	92	1200	30x64x14
36x60-SD-5RSX	36x60x9-1/4	36	•			102	1200	36x64x14
36x60-SD-5PHL	36x60x9-1/4	36		•		102	1200	36x64x14
36x60-SD-5PUL	36x60x9-1/4	36			•	102	1200	36x64x14
36x72-SD-5RSX	36x72x9-1/4	36	•			114	1200	36x76x14
36x72-SD-5PHL	36x72x9-1/4	36		•		114	1200	36x76x14
36x72-SD-5PUL	36x72x9-1/4	36			•	114	1200	36x76x14

SDH – Heavy Duty Platform Trucks

- Heavy duty steel deck platform truck
- 14 ga. reinforced deck
- Removable 1-5/16" diameter tube handle which fits on either end
- Two swivel and two rigid casters
- Casters bolted on
- Up to 2000 lbs. load capacity
- Heavy duty welded construction
- Durable blue powder coat finish

Part Number	Deck Size (in.) WxLxH	Overall Height (in.)	Caster Size/Type				Weight (lb.)	Capacity (lb.)	Shipping Size (in.) WxLxH
			6" Phenolic	6" Molded Rubber	8" Phenolic	8" Molded Rubber			
24x36-SDH-6PH	24x36x10	37	•				75	2000	24x40x16
24x36-SDH-6MR	24x36x10	37		•			76	1800	24x40x16
24x36-SDH-8PH	24x36x11	39			•		81	2000	24x40x18
24x36-SDH-8MR	24x36x12	39				•	82	2000	24x40x18
24x48-SDH-6PH	24x48x10	37	•				85	2000	24x52x16
24x48-SDH-6MR	24x48x10	37		•			86	1800	24x52x16
24x48-SDH-8PH	24x48x12	39			•		91	2000	24x52x18
24x48-SDH-8MR	24x48x12	39				•	92	2000	24x52x18
24x60-SDH-6PH	24x60x10	37	•				95	2000	24x64x16
24x60-SDH-6MR	24x60x10	37		•			96	1800	24x64x16
24x60-SDH-8PH	24x60x12	39			•		101	2000	24x64x18
24x60-SDH-8MR	24x60x12	39				•	102	2000	24x64x18
30x48-SDH-6PH	30x48x10-1/2	37	•				95	2000	30x52x16
30x48-SDH-6MR	30x48x10-1/2	37		•			96	2000	30x52x16
30x48-SDH-8PH	30x48x12-1/2	39			•		101	2000	30x52x18
30x48-SDH-8MR	30x48x12-1/2	39				•	102	2000	30x52x18
30x60-SDH-6PH	30x60x10-1/2	37	•				111	2000	30x64x16
30x60-SDH-6MR	30x60x10-1/2	37		•			112	1800	30x64x16
30x60-SDH-8PH	30x60x12-1/2	39			•		119	2000	30x64x18
30x60-SDH-8MR	30x60x12-1/2	39				•	120	2000	30x64x18
36x60-SDH-6PH	36x60x10-1/2	37	•				121	2000	36x64x16
36x60-SDH-6MR	36x60x10-1/2	37		•			122	1800	36x64x16
36x60-SDH-8PH	36x60x12-1/2	39			•		129	2000	36x64x18
36x60-SDH-8MR	36x60x12-1/2	39				•	130	2000	36x64x18
36x72-SDH-6PH	36x72x10-1/2	37	•				132	2000	36x76x16
36x72-SDH-6MR	36x72x10-1/2	37		•			133	1800	36x76x16
36x72-SDH-8PH	36x72x12-1/2	39			•		140	2000	36x76x18
36x72-SDH-8MR	36x72x12-1/2	39				•	141	2000	36x76x18



24x36-SDH-8MR

Caster Description
For all wheel & caster info & details, please see Section 13.



6PH
6" phenolic
caster



4MR or 6MR
4" or 6"
rubber caster



8PH
8" phenolic
caster



8MR
8" rubber
caster

SDF – Furniture Truck

- Carpeted deck to protect products from damage
- Heavy duty all-welded 1" square tube construction
- Two swivel and two rigid 4RSX rubber casters
- Rubber bumpers on all four corners
- Removable 1-5/16" diameter tube handle which fits on either end
- Durable blue powder coat finish

Part Number	Deck Size (in.)	Overall Height (in.)	Caster Size/Type (in.)	Weight (lb.)	Capacity (lb.)	Shipping Size (in.) WxLxH
30x48SDF-4RSX	30x48	33	4" rubber casters	50	800	30x48x11



30x48SDF-4RSX

SDEH – Extra Heavy Duty Platform Trucks

- Heavy duty steel deck platform truck
- 12 ga. reinforced deck
- Removable 1-5/16" diameter tube handle which fits on either end
- Two swivel and two rigid casters
- Casters bolted on
- 3000 lbs. capacity
- Heavy duty welded construction
- Durable blue powder coat finish

Part Number	Deck Size (in.) WxLxH	Overall Height (in.)	Caster Size/Type			Weight (lbs.)	Capacity (lbs.)	Shipping Size WxLxH
			8" Poly Urethane	8" Phenolic	8" Cast Iron			
24x48-SDEH-8PU	24x48x12-1/2	39	•			114	3000	24x52x18
24x48-SDEH-8PH	24x48x12-1/2	39		•		114	3000	24x52x18
24x48-SDEH-8CI	24x48x12-1/2	39			•	114	3000	24x52x18
24x60-SDEH-8PU	24x60x12-1/2	39	•			126	3000	24x64x18
24x60-SDEH-8PH	24x60x12-1/2	39		•		126	3000	24x64x18
24x60-SDEH-8CI	24x60x12-1/2	39			•	126	3000	24x64x18
30x48-SDEH-8PU	30x48x13	40	•			126	3000	30x52x19
30x48-SDEH-8PH	30x48x13	40		•		126	3000	30x52x19
30x48-SDEH-8CI	30x48x13	40			•	126	3000	30x52x19
30x60-SDEH-8PU	30x60x13	40	•			138	3000	30x64x19
30x60-SDEH-8PH	30x60x13	40		•		138	3000	30x64x19
30x60-SDEH-8CI	30x60x13	40			•	138	3000	30x64x19
36x60-SDEH-8PU	36x60x13	40	•			152	3000	36x64x19
36x60-SDEH-8PH	36x60x13	40		•		152	3000	36x64x19
36x60-SDEH-8CI	36x60x13	40			•	152	3000	36x64x19
36x72-SDEH-8PU	36x72x13	40	•			168	3000	36x76x19
36x72-SDEH-8PH	36x72x13	40		•		168	3000	36x76x19
36x72-SDEH-8CI	36x72x13	40			•	168	3000	36x76x19

Caster Descriptions

For all wheel & caster info & details, please see Section 13



◀ **8PH**
8"
phenolic
caster



◀ **8PU**
8"
polyurethane
caster



◀ **8CI**
8" cast
iron
caster



◀ **8FF or 10FF**
8" or 10"
flat
free caster



◀ **8PN or 10PN**
8" or 10"
pneumatic
caster

SD – Cushion Ride Platform Trucks

- Heavy duty steel deck platform truck
- 14 ga. reinforced deck
- Removable 1-5/16" diameter tube handle which fits on either end
- Two swivel and two rigid casters
- Casters bolted on
- Heavy duty welded construction
- Durable blue powder coat finish



24x48-SD-8PN

Part Number	Deck Size (in.) WxLxH	Overall Height (in.)	Caster Size/Type				Weight (lbs.)	Capacity (lbs.)	Shipping Size WxLxH
			8" Pneumatic	8" Flat Free	10" Pneumatic	10" Flat Free			
24x48-SD-8PN	24x48x12	39	•				91	1200	24x52x18
24x48-SD-8FF	24x48x12	39		•			90	1000	24x52x18
24x48-SD-10PN	24x48x14-1/2	41			•		95	1200	24x52x21
24x48-SD-10FF	24x48x14-1/2	41				•	94	1000	24x52x21
24x60-SD-8PN	24x60x12	39	•				101	1200	24x64x18
24x60-SD-8FF	24x60x12	39		•			100	1000	24x64x18
24x60-SD-10PN	24x60x14-1/2	41			•		105	1200	24x64x21
24x60-SD-10FF	24x60x14-1/2	41				•	104	1000	24x64x21
30x48-SD-8PN	30x48x12-1/2	39	•				101	1200	30x52x18
30x48-SD-8FF	30x48x12-1/2	39		•			100	1000	30x52x18
30x48-SD-10PN	30x48x15	42			•		105	1200	30x52x21
30x48-SD-10FF	30x48x15	42				•	104	1000	30x52x21
30x60-SD-8PN	30x60x12-1/2	39	•				119	1200	30x64x18
30x60-SD-8FF	30x60x12-1/2	39		•			118	1000	30x64x18
30x60-SD-10PN	30x60x15	42			•		124	1200	30x64x21
30x60-SD-10FF	30x60x15	42				•	123	1000	30x64x21
36x60-SD-8PN	36x60x12-1/2	39	•				129	1200	36x64x18
36x60-SD-8FF	36x60x12-1/2	39		•			128	1000	36x64x18
36x60-SD-10PN	36x60x15	42			•		134	1200	36x64x21
36x60-SD-10FF	36x60x15	42				•	133	1000	36x64x21
36x72-SD-8PN	36x72x12-1/2	39	•				140	1200	36x76x18
36x72-SD-8FF	36x72x12-1/2	39		•			139	1000	36x76x18
36x72-SD-10PN	36x72x15	42			•		145	1200	36x76x21
36x72-SD-10FF	36x72x15	42				•	144	1000	36x76x21

WD – Wood Deck Platform Trucks

- Ideal for moving products that could be scuffed by metal-to-metal contact
- Steel-reinforced hardwood deck
- Removable 1-5/16" diameter tube handle which fits on either end
- Two swivel and two rigid casters
- Casters bolted on
- Heavy duty welded construction
- Durable blue powder coat finish



24x36-WD-5RSX

Part Number	Deck Size WxLxH (in.)	Overall Height (in.)	Caster Size (in.) & Type	Capacity (lbs.)	Weight (lbs.)	Shipping Size WxLxH (in.)
24x36-WD-5RSX	24x36x10	36	5x1-1/4 RSX Rubber	1200	69	24x40x16
24x48-WD-5RSX	24x48x10	36	5x1-1/4 RSX Rubber	1200	80	24x52x16
30x48-WD-5RSX	30x48x10-1/4	36	5x1-1/4 RSX Rubber	1200	92	30x52x16
30x60-WD-5RSX	30x60x10-1/4	36	5x1-1/4 RSX Rubber	1200	105	30x64x16
Also Available with following caster options (not pictured):						
24x36-WD-5PHL	24x36x10	36	5x1-1/4 Phenolic	1200	70	24x40x16
24x48-WD-5PHL	24x48x10	36	5x1-1/4 Phenolic	1200	81	24x52x16
30x48-WD-5PHL	30x48x10-1/4	36	5x1-1/4 Phenolic	1200	93	30x52x16
30x60-WD-5PHL	30x60x10-1/4	36	5x1-1/4 Phenolic	1200	106	30x64x16
24x36-WD-8MR	24x36x13	39	8x2 Molded Rubber	2000	87	24x40x19
24x48-WD-8MR	24x48x13	39	8x2 Molded Rubber	2000	98	24x52x19
30x48-WD-8MR	30x48x13-1/4	39	8x2 Molded Rubber	2000	110	30x52x19
30x60-WD-8MR	30x60x13-1/4	39	8x2 Molded Rubber	2000	123	30x64x19
36x60-WD-8MR	36x60x13-1/4	39	8x2 Molded Rubber	2000	140	36x64x19
36x72-WD-8MR	36x72x13	39	8x2 Molded Rubber	2000	155	36x76x19
24x36-WD-8PH	24x36x13	39	8x2 Phenolic	2000	89	24x40x19
24x48-WD-8PH	24x48x13	39	8x2 Phenolic	2000	100	24x52x19
30x48-WD-8PH	30x48x13	39	8x2 Phenolic	2000	112	30x52x19
30x60-WD-8PH	30x60x13	39	8x2 Phenolic	2000	125	30x64x19
36x60-WD-8PH	36x60x13	39	8x2 Phenolic	2000	142	36x64x19
36x72-WD-8PH	36x72x13	39	8x2 Phenolic	2000	157	36x76x19

Caster Descriptions For all wheel & caster info & details, please see Section 13



♦ **5RSX**
5" rubber
caster



5PH
5" phenolic
caster



5PUL
5" polyurethane
caster



5PO
5" polyolefin
caster



8PH
8" phenolic
caster



8MR
8" molded
rubber
caster

PWD – Light Duty Wood Deck Platform Trucks

- Economic plywood deck ideal for moving products that could be scuffed by metal-to-metal contact.
- Removable 1-5/16" diameter tube handle which fits on either end
- Two swivel and two rigid casters
- Casters bolted on
- 800 lbs. capacity
- Heavy duty welded construction
- Durable blue powder coat finish

Part Number	Deck Size WxLxH (in.)	Overall Height (in.)	Caster Size (in.) & Type	Capacity (lbs.)	Weight (lbs.)	Shipping Size WxLxH (in.)
18x36-PWD-5RSX	18x36x10	36	5x1-1/4 RSX Rubber	800	35	18x38x14
24x36-PWD-5RSX	24x36x10	36	5x1-1/4 RSX Rubber	800	39	24x38x14
24x48-PWD-5RSX	24x48x10	36	5x1-1/4 RSX Rubber	800	48	24x50x14
24x60-PWD-5RSX	24x60x10	36	5x1-1/4 RSX Rubber	800	54	24x62x14
30x60-PWD-5RSX	30x60x10-1/4	36	5x1-1/4 RSX Rubber	800	60	30x62x14
Also Available with following caster options (not pictured):						
18x36-PWD-5PHL	18x36x10	36	5x1-1/4 Phenolic	800	36	18x38x14
24x36-PWD-5PHL	24x36x10	36	5x1-1/4 Phenolic	800	40	24x38x14
24x48-PWD-5PHL	24x48x10	36	5x1-1/4 Phenolic	800	49	24x50x14
24x60-PWD-5PHL	24x60x10	36	5x1-1/4 Phenolic	800	55	24x62x14
30x60-PWD-5PHL	30x60x10-1/4	36	5x1-1/4 Phenolic	800	61	30x62x14
18x36-PWD-5PUL	18x36x10	36	5x1-1/4 Polyurethane	800	35	18x38x14
24x36-PWD-5PUL	24x36x10	36	5x1-1/4 Polyurethane	800	39	24x38x14
24x48-PWD-5PUL	24x48x10	36	5x1-1/4 Polyurethane	800	48	24x50x14
24x60-PWD-5PUL	24x60x10	36	5x1-1/4 Polyurethane	800	54	24x62x14
30x60-PWD-5PUL	30x60x10-1/4	36	5x1-1/4 Polyurethane	800	60	30x62x14
18x36-PWD-5PO	18x36x10	36	5x1-1/4 Polyolefin	800	34	18x38x14
24x36-PWD-5PO	24x36x10	36	5x1-1/4 Polyolefin	800	38	24x38x14
24x48-PWD-5PO	24x48x10	36	5x1-1/4 Polyolefin	800	47	24x50x14
24x60-PWD-5PO	24x60x10	36	5x1-1/4 Polyolefin	800	53	24x62x14
30x60-PWD-5PO	30x60x10-1/4	36	5x1-1/4 Polyolefin	800	59	30x62x14

HWD – Heavy Duty Wood Deck Platform Trucks



30x48-HWD-12MR

- Ideal for moving products that could be scuffed by metal-to-metal contact.
- Steel-reinforced 7/8" hardwood slat deck
- Removable 1-5/16" diameter tube handle which fits on either end
- Two 12" x 2" molded rubber load wheels
- Two 6" molded rubber on cast swivel casters (bolted on)
- 3000 lbs. capacity
- Heavy duty welded construction
- Durable blue powder coat finish

Part Number	Deck Size WxLxH (in.)	Overall Height (in.)	Caster Size (in.) & Type	Capacity (lbs.)	Weight (lbs.)	Shipping Size WxLxH (in.)
30x48-HWD-12MR	30x48x14	39	12x2-1/2 Molded Rubber	3000	196	30x52x20
30x60-HWD-12MR	30x60x14	39	12x2-1/2 Molded Rubber	3000	221	30x64x20
36x60-HWD-12MR	36x60x14	39	12x2-1/2 Molded Rubber	3000	245	36x64x20
36x72-HWD-12MR	36x72x14	39	12x2-1/2 Molded Rubber	3000	273	36x76x20
Also Available with following caster options (not pictured):						
30x48-HWD-12PH	30x48x14	39	12x2-1/2 Phenolic	3000	196	30x52x20
30x60-HWD-12PH	30x60x14	39	12x2-1/2 Phenolic	3000	221	30x64x20
36x60-HWD-12PH	36x60x14	39	12x2-1/2 Phenolic	3000	245	36x64x20
36x72-HWD-12PH	36x72x14	39	12x2-1/2 Phenolic	3000	273	36x76x20

AC – Aluminum Deck Platform Trucks

- Also available in smooth plate decks
- 1/8" reinforced checkerplate deck
- Removable 1-5/16" diameter tube handle which fits on either end
- 2000 lbs. capacity
- Heavy duty welded construction
- Durable blue powder coat finish on handle



24x36-AC-8MR

Caster Descriptions

For all wheel & caster info & details, please see Section 13.



12MR
12" molded rubber caster



12PH
12" phenolic caster



6MR or 8MR
6" or 8" molded rubber

Part Number	Deck Size WxLxH (in.)	Overall Height (in.)	Caster Size (in.) & Type	Capacity (lbs.)	Weight (lbs.)	Shipping Size WxLxH (in.)
24x36-AC-6MR	24x36x10	37	6x2 Molded Rubber	2000	64	24x36x15
24x48-AC-6MR	24x48x10	37		2000	69	24x48x15
30x60-AC-6MR	30x60x10	37		2000	79	30x60x15
36x60-AC-6MR	36x60x10	37		2000	84	36x60x15
Also available with following caster options (as shown)						
24x36-AC-8MR	24x36x12	39	8x2 Molded Rubber	2000	66	24x36x17
24x48-AC-8MR	24x48x12	39		2000	71	24x48x17
30x60-AC-8MR	30x60x12	39		2000	81	30x60x17
36x60-AC-8MR	36x60x12	39		2000	86	36x60x17
Smooth Plate Deck Platform (not shown)						
24x36-AS-6MR	24x36x10	37	6x2 Molded Rubber	2000	64	24x36x15
24x48-AS-6MR	24x48x10	37		2000	69	24x48x15
30x60-AS-6MR	30x60x10	37		2000	79	30x60x15
36x60-AS-6MR	36x60x10	37		2000	84	36x60x15
Also available with following caster options (not shown)						
24x36-AS-8MR	24x36x12	39	8x2 Molded Rubber	2000	69	24x36x17
24x48-AS-8MR	24x48x12	39		2000	71	24x48x17
30x60-AS-8MR	30x60x12	39		2000	79	30x60x17
36x60-AS-8MR	36x60x12	39		2000	86	36x60x17

WT – Wagon Trucks

- Steel deck wagon truck – also available with wood deck
- T-handle with 5th wheel steering makes these trucks easy to steer under full loads
- 14 ga. reinforced deck
- Heavy duty welded construction
- Durable blue powder coat finish

Part Number	Deck Size WxLxH (in.)	Deck Type	Caster Size (in.) & Type	Capacity (lbs.)	Weight (lbs.)	Shipping Size WxLxH (in.)
24x36SDWT-10PN	24x36x15	Steel	10x3 Pneumatic	1000	110	24x42x30
24x48SDWT-10PN	24x48x15	Steel	10x3 Pneumatic	1000	120	24x54x30
30x60SDWT-10PN	30x60x15	Steel	10x3 Pneumatic	1000	140	30x66x30
36x60SDWT-10PN	36x60x15	Steel	10x3 Pneumatic	1000	155	36x66x30
Wooden Deck Option (not shown):						
24x36WDWT-10PN	24x36x15	Wood	10x3 Pneumatic	1000	120	24x42x30
24x48WDWT-10PN	24x48x15	Wood	10x3 Pneumatic	1000	130	24x54x30
30x60WDWT-10PN	30x60x15	Wood	10x3 Pneumatic	1000	150	30x66x30
36x60WDWT-10PN	36x60x15	Wood	10x3 Pneumatic	1000	165	36x66x30

30x48-SDWT-10PN



Wheel Description

For all wheel & caster info & details, please see Section 13.



10PN
10" pneumatic wheel



8MR
8" molded rubber wheel

SLS – Semi-Live Skid Platform Trucks

- Steel deck semi-live skid decks – also available with wood deck
- Easily manoeuvred in tight areas
- Jack handle sold separately
- 14 ga. reinforced deck
- Heavy duty welded construction
- Durable blue powder coat finish



24x36SDSLS-8MR

Semi Live Skid Jack Handle

- 1-5/16" heavy duty tube construction
- Two 8"x2" mold on rubber casters
- Heavy duty welded construction
- Durable blue powder coat finish



SLJ-8MR

Part Number	Deck Size WxLxH (in.)	Deck Type	Caster Size (in.) & Type	Capacity (lbs.)	Weight (lbs.)	Shipping Size WxLxH (in.)
24x36SDSLS-8MR	24x36x12	14 ga. Reinforced Steel	8x2 Molded Rubber	2000	110	24x40x14
24x48SDSLS-8MR	24x48x12		8x2 Molded Rubber	2000	120	24x52x14
30x48SDSLS-8MR	30x48x12		8x2 Molded Rubber	2000	130	30x52x14
30x60SDSLS-8MR	30x60x12		8x2 Molded Rubber	2000	140	30x64x14
36x60SDSLS-8MR	36x60x12		8x2 Molded Rubber	2000	155	36x64x14
36x72SDSLS-8MR	36x72x12		8x2 Molded Rubber	2000	169	36x76x14
Wood Deck Options (not shown):						
24x36WDSLS-8MR	24x36x12	7/8" Hardwood Slats	8x2 Molded Rubber	2000	120	24x40x14
24x48WDSLS-8MR	24x48x12		8x2 Molded Rubber	2000	130	24x52x14
30x48WDSLS-8MR	30x48x12		8x2 Molded Rubber	2000	140	30x52x14
30x60WDSLS-8MR	30x60x12		8x2 Molded Rubber	2000	150	30x64x14
36x60WDSLS-8MR	36x60x12		8x2 Molded Rubber	2000	165	36x64x14
36x72WDSLS-8MR	36x72x12		8x2 Molded Rubber	2000	179	36x76x14
SLJ-8MR	—	—	8x2 Molded Rubber	—	25	11X12X53

Steel or Mesh Box Cart

- 1" x 16 ga. round tube construction
- 14 ga. reinforced deck
- 24" high sides of 14 ga. steel or 2" x 2" mesh (above deck)
- Push handle on swivel end
- Two swivel and two rigid 5" x 1-1/4" blue rubber non-marking casters (5RSX)
- Heavy duty welded construction
- 1000 lbs. capacity
- Durable blue powder coat finish

OPTIONS:
~ Locking swivel casters
Please call for details.

	Part Number	Box Size (in.)	Weight (lbs.)	Shipping Size WxLxH (in.)
STEEL	24x36-SBC-5RSX	24x36	139	24x42x33
	24x48-SBC-5RSX	24x48	169	24x54x33
	30x60-SBC-5RSX	30x60	198	30x64x33
	36x60-SBC-5RSX	36x60	221	36x64x33
	36x72-SBC-5RSX	36x72	265	36x76x33
MESH	24x36-MBC-5RSX	24x36	104	24x42x33
	24x48-MBC-5RSX	24x48	130	24x54x33
	30x60-MBC-5RSX	30x60	152	30x64x33
	36x60-MBC-5RSX	36x60	171	36x64x33
	36x72-MBC-5RSX	36x72	182	36x76x33



24x36-MBC-5RSX



24x48-SBC-5RSX

Caster Description

For all wheel & caster info & details, please see Section 13.



◆ 5RSX

5" blue rubber casters

Three-Sided Steel or Mesh Box Cart

- 14 ga. reinforced deck
- 48" high sides of 14 ga. steel or 2" x 2" mesh (above deck)
- Push handle on swivel end
- Two swivel and two rigid 5" x 1-1/4" blue rubber non-marking casters (5RSX)
- Heavy duty welded construction
- 1000 lbs. capacity
- Durable blue powder coat finish

OPTIONS:
~ Locking swivel casters
Please call for details.

	Part Number	Box Size (in.)	Weight (lbs.)	Shipping Size WxLxH (in.)
STEEL	24x36-TSS-5RSX	24x36	175	24x40x57
	24x48-TSS-5RSX	24x48	191	24x52x57
	30x60-TSS-5RSX	30x60	220	30x64x57
	36x60-TSS-5RSX	36x60	253	36x64x57
	36x72-TSS-5RSX	36x72	294	36x76x57
MESH	24x36-TSM-5RSX	24x36	106	24x40x57
	24x48-TSM-5RSX	24x48	118	24x52x57
	30x60-TSM-5RSX	30x60	135	30x64x57
	36x60-TSM-5RSX	36x60	150	36x64x57
	36x72-TSM-5RSX	36x72	170	36x76x57



24x48-TSS-5RSX



24x48-TSM-5RSX

Custom Carts available

Please contact us with details and we'll be happy to work out a quote.

Rolling Lock-up Security Cart

- Mesh walls for visibility and identification
- Heavy duty all welded construction
- Double swinging doors, with padlock pin latches
- 8" x 3" 12 ga. fork pockets
- 2 rigid and 2 swivel casters, 5" mold on rubber (5MOR) or 6" blue rubber non-marking casters (6RSX)
- Durable blue powder coat finish

Part Number	No. of Shelves	Shelf Size (in.)	Shelf Clearance	Weight (lbs.)	Overall Height (in.)	Shipping Size WxLxH (in.)
RLSC-2-5MOR	2	24x48	32-1/2	255	77-1/2	26x54x77
RLSC-3-5MOR	3	24x48	21-1/4	285	77-1/2	26x54x77
RLSC-4-5MOR	4	24x48	15-1/2	320	77-1/2	26x54x77
RLSC-2-6RSX	2	24x48	32-1/2	255	77-1/2	26x54x78
RLSC-3-6RSX	3	24x48	21-1/4	285	77-1/2	26x54x78
RLSC-4-6RSX	4	24x48	15-1/2	320	77-1/2	26x54x78



RLSC-3-6RSX



RLSC-2-5MOR



RLSC-4-5MOR

Caster Description

For all wheel & caster info & details, please see Section 13.



6RSX
6" blue
rubber
casters



5MOR
5"
molded
rubber
casters

◆ Stock item

Liquid Propane Gas Cylinder Cage



GS-6

- Heavy duty construction
- 1-1/2" angle frame construction
- 2" x 2" welded wire mesh sides and door for venting
- Sheet metal top and base
- Top is sloped to drain away rain and water.
- Double-hinged door c/w padlock hasp
- Legs pre-drilled for floor anchoring
- G-12 comes complete with middle shelf
- Durable yellow powder coat finish
- Ships fully assembled


Part Number	Cylinder Capacity	Shipping Size WxLxH (in.)	Weight (lbs.)
GS-6	6	30x39x37	125
GS-12	12	30x39x72	180

Note: Constructed to meet or exceed strict CSA International B149.2-07 Propane Storage and Handling Code. Cylinders must be stored vertically at all times.


GS-10

- Ten gas cylinder capacity (9" dia.)
- 1-1/2" angle frame construction
- 2" x 2" welded wire mesh sides and door
- Solid 14 ga. top and solid 14 ga. reinforced floor
- Single-hinged door c/w padlock hasp
- Legs pre-drilled for floor anchoring
- Durable yellow powder coat finish
- Ships fully assembled

Part Number	Cylinder Capacity	Shipping Size WxLxH (in.)	Weight (lbs.)
GS-10	10	34x41x72	270

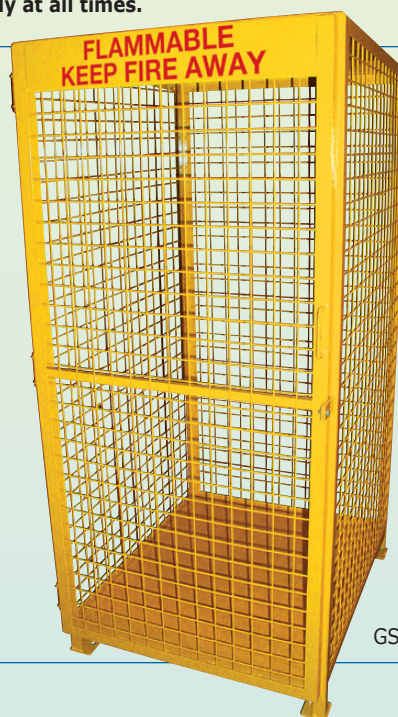

GS-10

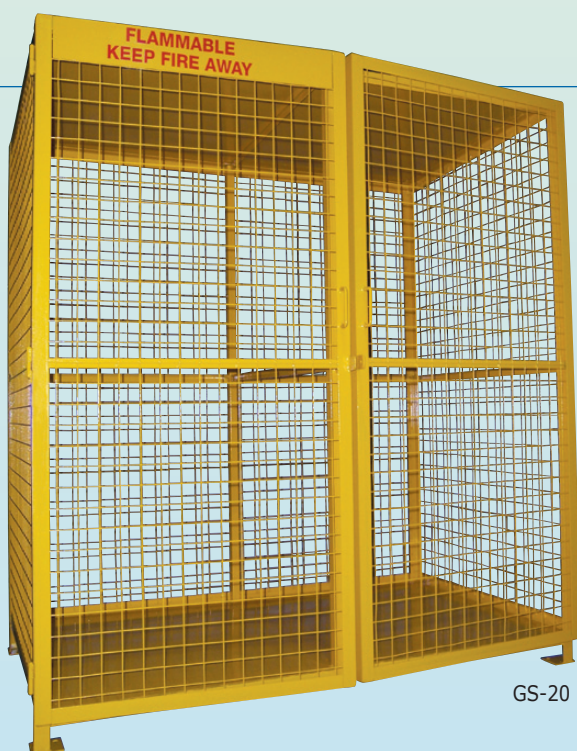

GS-20

GS-20

- Twenty gas cylinder capacity (9" dia.)
- 1-1/2" angle frame construction
- 2" x 2" welded wire mesh sides and door,
- Solid 14 ga. top and solid 14 ga. reinforced floor
- Double-hinged door c/w padlock hasp
- Legs pre-drilled for floor anchoring
- Durable yellow powder coat finish
- Ships fully assembled

Part Number	Cylinder Capacity	Shipping Size WxLxH (in.)	Weight (lbs.)
GS-20	20	41x65x72	400



VBSR-2436

VBSR-2436*

- Vertical Bar Storage Rack
- 1-1/2" angle construction
- Three sections capable of carrying 12-foot bars
- Predrilled for floor anchoring
- Durable blue powder coat finish

Part Number	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
VBSR-2436	3000	24x36x84	70

* Certified by an Ontario Professional Engineer.

MBR-3458

- Mobile Bar Storage Rack
- Structural 3" rectangular tube construction
- Folds down into storage position
- Durable blue powder coat finish

Part Number	Capacity (lbs.)	Shipping Size WxLxH (in.)	Weight (lbs.)
MBR-3458-5RSX	1000	36x60x60	120
MBR-3458-8MR	2000	36x60x64	130
MBR-3458-8PH	3000	36x60x64	130



MBR-3458-5RSX

Caster

Description
For all wheel & caster info & details, please see Section 13.



◀ **5RSX**
5" blue rubber casters



◀ **8MR**
8" molded rubber casters



◀ **8PH**
8" phenolic casters

Bike Rack

- High density bike storage
- 4 pre-drilled bases for secure anchoring
- Heavy duty all-welded construction
- Durable black powder-coat finish



SBR-6




DBR-12

Part Number	Overall Height (in.)	Base Size (in.)	Bike Capacity	Weight (lb.)	Shipping Size WxLxH
SBR-6	30	16x73	6	60	16x73x30
SBR-10	30	16x121	10	85	16x121x30
DBR-12	30	24x73	12	80	24x73x30
DBR-20	30	24x121	20	115	24x121x30

Wall-Mounted Tire Rack

- 60" of available tire space, holding up to 6 tires (depending on size)
- Wall-mounted to keep tires out of the way until needed
- 1 5/16" round tube construction
- 4 pre-drilled plates for secure mounting
- Heavy duty all-welded construction
- Durable blue powder coat finish

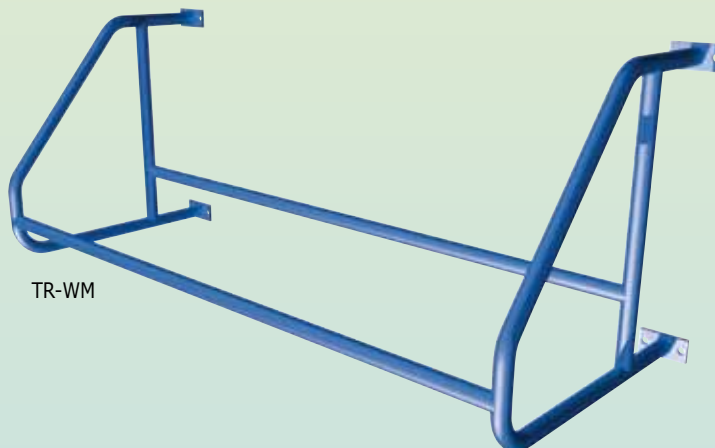

TR-WM

Part Number	Overall Height (in.)	Base Size (in.)	Tire Capacity	Weight (lb.)	Shipping Size WxLxH
TR-WM	25	27x82	6 (size dependent)	33.5	24x63x25



TR-R

Mobile Tire Rack

- 2 shelves with 7 tire capacity each
- 1 5/16" round tube construction
- Heavy duty all-welded construction
- 2 rigid and 2 swivel 5" mold on rubber casters
- Durable blue powder coat finish

Part Number	Overall Height (in.)	Base Size (in.)	Tire Capacity	Weight (lb.)	Shipping Size WxLxH
TR-R	72	27x82	14 (size dependent)	90	27x85x72

Work Platforms*

- Available in two sizes - 36"W x 36"D and 48"W x 48"D
- 42" high sides with 72" high back to protect workers from mast of fork truck
- 2" x 2" welded wire mesh cage
- Non-skid checkerplate platform
- Lockable swing gate
- 8"W x 3"H fork pockets with safety chain - 26" centre-to-centre dimension
- All-welded heavy duty construction
- Capacity 800 lbs.
- Available with two swivel and two rigid 5" x 1-1/4" blue rubber non-marking casters
- Available with optional light bulb caddy (LBC-1515 pictured below)
- Durable blue powder coat finish


Part Number	Casters Yes/No	Meets ASME B56.1 Safety Standard	Weight (lbs.)	Shipping Size WxLxH (in.)
36x36-WP	NO	YES	160	36x36x75
36x36-WP-5RSX	YES	YES	170	36x36x82
48x48-WP	NO	YES	220	48x48x75
48x48-WP-5RSX	YES	YES	230	48x48x82



- *• Meets and exceeds ASME B56.1 Safety Standards
- Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851 and the Canada Occupational Health and Safety Regulations Part 7, Section 12.10, Subsection 3.
 - Ontario Professional Engineer approved
 - Maximum rated load: 800 lbs.

LBC-15x15 Light Bulb Caddy

- To be used with work platform
- All-welded heavy duty construction
- 15"W x 15"D x 43"H
- 1-5/16" tube construction
- 25 lbs.
- Durable blue powder coat finish

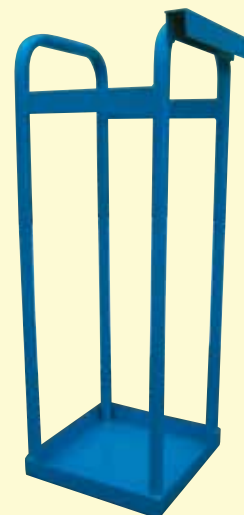



36x36x48-WP

Elevated Work Platforms*

- Available with a 48" high deck or a 72" high deck
- 42" high sides with 72" high back to protect workers from mast of fork truck
- 2" x 2" welded wire mesh cage
- Non-skid checkerplate platform
- Lockable swing gate
- 8"W x 3"H fork pockets with safety chain - 26" centre-to-centre dimension
- All-welded heavy duty construction
- Capacity 800 lbs.
- Available with two swivel and two rigid 5" x 1-1/4" blue rubber non-marking casters
- Available with optional light bulb caddy (LBC-1515 pictured below)
- Durable blue powder coat finish

Part Number	Platform Height (in.)	Meets Applicable ASME B56.1 Safety Standard	Weight (lbs.)	Shipping Size WxLxH (in.)
36x36x48-WP	48	YES	230	36x36x120
36x36x72-WP	72	YES	285	36x36x144


Caster Description
For all wheel & caster info & details, please see Section 13.

♦ **5RSX**
5" blue rubber casters


Options for Work Platforms

LBC-15x15 Light Bulb Caddy

- To be used with work platform
- All-welded heavy duty construction
- 15"W x 15"D x 43"H
- 1-5/16" tube construction
- 25 lbs.
- Durable blue powder coat finish

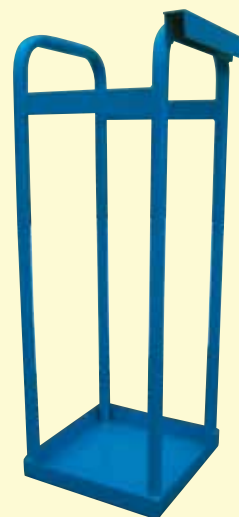

- *• Meets and exceeds ASME B56.1 Safety Standards
- Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851 and the Canada Occupational Health and Safety Regulations, Part 7, Section 12.10, Subsection 3.
 - Ontario Professional Engineer approved
 - Maximum rated load: 800 lbs.

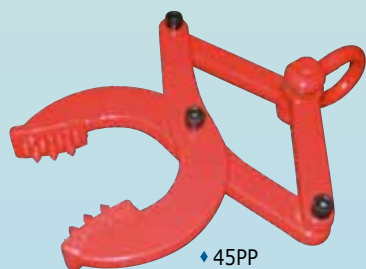

♦ 45PP



Pallet Puller

- Pulls pallets to within forklift's reach
- Dual pin scissor action for increased clamping pressure
- Solid steel construction
- 2000 lbs. capacity
- Extended frame 17" x 9.5"; open frame 12" x 12"; Max jaw opening 4.5"
- Durable red powder coat finish
- Weight: 14 lbs.



Self-Dumping Hopper

- Simple "wedge box", balanced design, allowing the box to dump and return to position without assistance, under normal operating conditions
- Heavy-duty base with integral fork pockets to allow safe transportation and use
- Box available in 1/8" or 3/16" sheet metal
- Self-aligning "trap free" guide system for smooth operation
- Positive locking lever latch release system for easy control
- Heavy duty all-welded steel construction
- Fork pockets:
3" x 7-1/2" at 23" c/c for the 1, 1-1/2 and 2 cubic yard hopper
3" x 7-1/2" at 21-7/8" c/c for the 3/4-yard hopper
3" x 7-1/2" at 9-3/4" c/c for the 1/2-yard hopper
- Durable blue powder coat finish

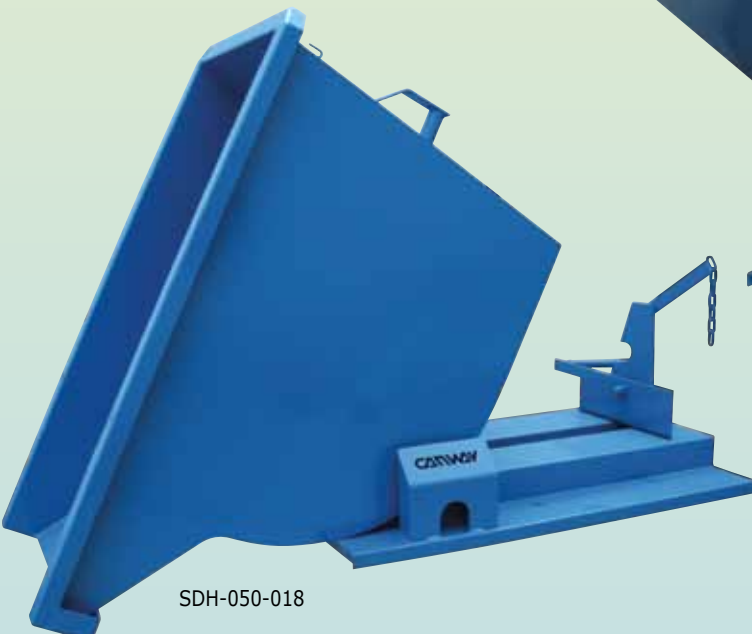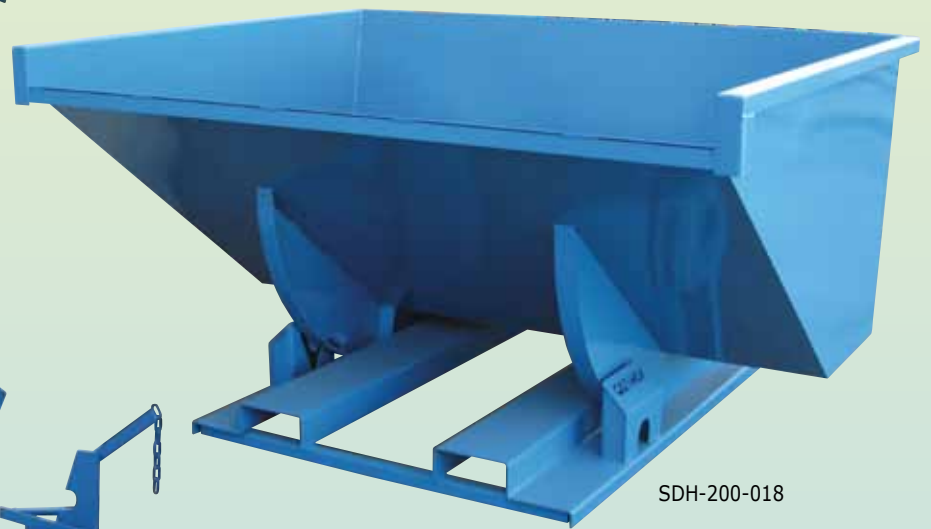

Caster Options



♦ **6MR**
6" molded rubber
caster
1800 lb. capacity
per set



6PH
6" phenolic caster
3600 lb. capacity
per set

Part Number	Thickness (in.) of Box Sheet Metal	Box Size (cu. yard)	Box Size WxLxH (in.)	Weight (lbs.)	Shipping Size WxLxH (in.)
♦ SDH-050-018	1/8	0.5	24x53x29	385	32x57x36
♦ SDH-075-018	1/8	0.75	36x53x29	430	44x60x36
♦ SDH-100-018	1/8	1	36x61x34	575	44x64x41
♦ SDH-150-018	1/8	1.5	54x61x34	630	59x64x41
♦ SDH-200-018	1/8	2	72x61x34	685	77x64x41
SDH-100-316	3/16	1	36x61x34	750	44x64x41
SDH-150-316	3/16	1.5	54x61x34	825	59x64x41
SDH-200-316	3/16	2	72x61x34	900	77x64x41

NH Mobile Ladder Stands* – No Handrail

- 1" x 16 ga. round tube construction
- 15" platform depth
- 3" spring-loaded non-marking casters
- 24"x 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 26" overall width
- 400 lb. capacity
- Durable blue powder coat finish


OPTIONS:

- ~ Extended platforms
- Please call for details.*



Part Number	No. of Steps	Platform Height (in.)	Base Size (in.) LxW	Weight (lbs.)	Shipping Size (in.) LxWxH
1NH	1	9	18x28	25	18x28x10
2NH	2	18	24x28	30	24x28x19
3NH	3	27	31x28	40	31x28x28
4NH	4	36	37x28	55	37x28x37
5NH	5	45	43x28	65	43x28x46

Parts for all NH ladders

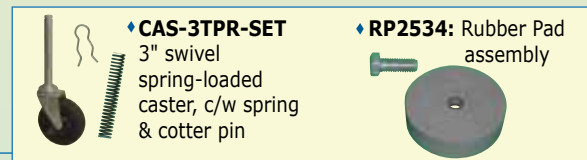

NH-SS Stainless Steel Mobile Ladder Stands* – No Handrail

- 1" stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 24" x 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 15" platform depth
- All components except casters and springs are fabricated from high quality stainless steel
- 400 lbs. capacity
- Ships all welded

OPTIONS:

- ~ Extended platforms
- ~ 316 #4 brushed finish
- Please call for details.*

Part Number	No. of Steps	Platform Height (in.)	Base Size (in.) LxW	Weight (lbs.)	Shipping Size (in.) LxWxH
1NH-SS	1	9	18x28	30	18x28x10
2NH-SS	2	18	24x28	40	24x28x19
3NH-SS	3	27	31x28	53	31x28x28
4NH-SS	4	36	37x28	62	37x28x37
5NH-SS	5	45	43x28	95	43x28x46

ANH Aluminum Mobile Ladder Stands* – No Handrail

- 1" aluminum round tube construction
- 24" x 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 15" platform depth
- 300 lbs. capacity
- Ships all welded
- Durable blue powder coat finish

Part Number	No. of Steps	Platform Height (in.)	Base Size (in.) LxW	Weight (lbs.)	Shipping Size (in.) LxWxH
1ANH	1	9	18x28	14	18x28x10
2ANH	2	18	24x28	24	24x28x19
3ANH	3	27	31x28	32	31x28x28
4ANH	4	36	37x28	37	37x28x37
5ANH	5	45	43x28	57	43x28x46

- * Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
 - Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
 - Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
 - Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum
- See website for:
- Ladder Assembly Instructions and User Guide
 - Schematic Drawings with dimensions and isometric view
 - Canway Certification Statement covering Mobile Ladder Stands

SNH Safety Angle Mobile Ladder Stands* – No Handrail

- 50° safety angle
- 1" x 16 ga. round tube construction
- 19" platform depth
- 3" spring-loaded non-marking casters
- 24" x 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 26" overall width
- 400 lb. capacity
- Durable blue powder coat finish

Diamond Channel Grating



DCG-H 7-1/2" deep tread standard
DCG-SH 9-1/2" deep tread for safety ladders




Part Number	No. of Steps	Platform Height (in.)	Base Size (in.)	Weight (lbs.)	Shipping Size (in.) LxWxH
2SNH	2	20	31x28	47	31x28x21
3SNH	3	30	41x28	57	41x28x31
4SNH	4	40	50x28	67	50x28x41

Parts for all SNH ladders



♦ **CAS-3TPR-SET**
 3" swivel spring-loaded caster, c/w spring & cotter pin



♦ **RP2534:** Rubber Pad assembly

SNH-SS Stainless Steel Safety Angle Mobile Ladder Stands* – No Handrail

- 1" Type 304 stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 24" x 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 19" platform depth
- 400 lbs. capacity
- All components except casters and springs are fabricated from high quality stainless steel
- Ships all welded

Part Number	No. of Steps	Platform Height (in.)	Base Size (in.)	Weight (lbs.)	Shipping Size (in.) LxWxH
2SNH-SS	2	20	31x28	47	31x28x21
3SNH-SS	3	30	41x28	57	41x28x31
4SNH-SS	4	40	50x28	67	50x28x41

Shipping Details:

1-5 step ladders ship fully assembled.
 6 step and larger ladders ship knocked down.
 Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.

- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR

ASNH Aluminum Safety Angle Mobile Ladder Stands* – No Handrail

- 1" aluminum round tube construction
- 24" x 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 19" platform depth
- 300 lbs. capacity
- Ships all welded
- Durable blue powder coat finish

Part Number	No. of Steps	Platform Height (in.)	Base Size (in.)	Weight (lbs.)	Shipping Size (in.) LxWxH
2ASNH	2	20	31x28	28	31x28x21
3ASNH	3	30	41x28	34	41x28x31
4ASNH	4	40	50x28	40	50x28x41

- * Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
- Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
- Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
- Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:

- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item


H Mobile Ladder Stands* – With Handrails

- 1" x 16 ga. round tube construction
- 42" high handrail
- 15" platform depth
- 5"x1-1/4" RSX rubber swivel casters on trip step mechanism
- 3" spring-loaded casters on 1H-3H
- Positive floor locking trip step mechanism on 4H and up
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- 1H – 5H ship fully assembled;
- 6H – 20H ship knocked down
- Durable blue powder coat finish

OPTIONS:

- ~ Front or side walk-through
 - ~ Fold-down handrail
 - ~ Extended platform
- Please call for details.*

Diamond Channel Grating



DCG-H 7-1/2" deep tread standard
DCG-SH 9-1/2" deep tread for safety ladders

Wheel Description
 For all wheel & caster info & details, please see Section 13.




♦ **6PO**
 6" polyolefin wheel (4H-7H ladders)




♦ **8PO**
 8" polyolefin wheel (8H-20H ladders)

Parts for 1H – 3H ladders



Parts for 4H – 20H ladders



Parts for H ladders



Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.)	Weight (lbs.)	Wheel/Caster Type & Size (in.)	Shipping Size (in.) LxWxH
1H	1	9	24	18x28	35	3" spring-loaded non-marking casters	18x28x51
2H	2	18	24	24x28	50		24x28x60
♦ 3H	3	27	24	31x28	60		31x28x69
♦ 4H	4	36	24	37x34	85	5" rubber casters	37x34x78
♦ 5H	5	45	24	43x34	95		43x34x87
♦ 6H	6	54	24	48x34	115		102x34x39
7H	7	63	24	53x34	125		110x34x39
♦ 8H	8	72	28	59x38	150		124x38x39
9H	9	81	28	65x38	170	5" rubber casters 8" polyolefin wheels	136x38x39
♦ 10H	10	90	28	70x38	175		144x38x39
11H	11	99	28	75x38	180		155x38x39
♦ 12H	12	108	28	81x38	200		166x38x39
13H	13	117	28	86x38	215		177x38x39
14H	14	126	28	89x38	250		187x38x39
15H	15	135	28	94x38	260		197x38x39
16H	16	144	28	100x38	270		208x38x39
17H	17	153	28	106x46	315		219x46x39
18H	18	162	28	111x46	325		229x46x39
19H	19	171	28	117x46	345		240x46x39
20H	20	180	28	122x46	355		249x46x39

The following ladders are special order and cannot be returned – please check measurements carefully.

17H	17	153	28	106x46	315	5" rubber casters 8" polyolefin wheels	219x46x39
18H	18	162	28	111x46	325		229x46x39
19H	19	171	28	117x46	345		240x46x39
20H	20	180	28	122x46	355		249x46x39

- * Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
- Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
- Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
- Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:

- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item

H-SS Stainless Steel Mobile Ladder Stands* – With Handrails



Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.)	Weight (lbs.)	Wheel/Caster Type & Size (in.)	Shipping Size (in.) LxWxH
1H-SS	1	9	24	18x28	35	3" spring-loaded non-marking casters	18x28x51
2H-SS	2	18	24	24x28	50		24x28x60
3H-SS	3	27	24	31x28	60		31x28x69
4H-SS	4	36	24	37x34	85	5" rubber casters 6" polyolefin wheels	37x34x78
5H-SS	5	45	24	43x34	95		43x34x87
6H-SS	6	54	24	48x34	115		102x34x39
7H-SS	7	63	24	53x34	125		110x34x39
8H-SS	8	72	28	59x38	150	5" rubber casters 8" polyolefin wheels	124x38x39
9H-SS	9	81	28	65x38	170		136x38x39
10H-SS	10	90	28	70x38	175		144x38x39
11H-SS	11	99	28	75x38	180		155x38x39
12H-SS	12	108	28	81x38	200		166x38x39
13H-SS	13	117	28	86x38	215		177x38x39
14H-SS	14	126	28	89x38	250		187x38x39
15H-SS	15	135	28	94x38	260		197x38x39
16H-SS	16	144	28	100x38	270		208x38x39

- 1" stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- Positive floor locking trip step mechanism on 4H and up
- 15" platform depth
- 1H-SS – 5H-SS ship fully assembled;
6H-SS – 16H-SS ship knocked down

- 400 lbs. capacity
- All components except casters and springs are fabricated from high quality stainless steel

OPTIONS:

- ~ Front or side walk-through (comes with safety chains or gate)
 - ~ Extended platform
 - ~ Fold-down handrail
- Please call for details.*

Wheel Description

For all wheel & caster info & details, please see Section 13.




- ♦ 6PO or ♦8PO
6" or 8"
polyolefin wheel


Parts for 1H – 3H ladders



Parts for 4H – 16H ladders



Parts for H ladders



AH Aluminum Mobile Ladder Stands* – With Handrails

- 1" aluminum round tube construction
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- Positive floor locking trip step mechanism on 4H and up
- 15" platform depth
- 300 lbs. capacity
- 1AH – 5AH ship fully assembled;
6AH – 16AH ship knocked down
- Durable blue powder coat finish

OPTIONS:

- ~ Front or side walk-through (comes with safety chains or gate)
- ~ Extended platform.
- ~ Fold-down handrail
- ~ 316 #4 brushed finish *Please call for details.*

Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.)	Weight (lbs.)	Wheel/Caster Type & Size (in.)	Shipping Size (in.) LxWxH
1AH	1	9	24	18x28	21	3" spring-loaded non-marking casters	18x28x51
2AH	2	18	24	24x28	30		24x28x60
3AH	3	27	24	31x28	36		31x28x69
4AH	4	36	24	37x34	51	5" rubber casters 6" polyolefin wheels	37x34x78
5AH	5	45	24	43x34	57		43x34x87
6AH	6	54	24	48x34	69		102x34x39
7AH	7	63	24	53x34	75		110x34x39
8AH	8	72	28	59x38	90	5" rubber casters 8" polyolefin wheels	124x38x39
9AH	9	81	28	65x38	102		136x38x39
10AH	10	90	28	70x38	105		144x38x39
11AH	11	99	28	75x38	108		155x38x39
12AH	12	108	28	81x38	120		166x38x39
13AH	13	117	28	86x38	129		177x38x39
14AH	14	126	28	89x38	150		187x38x39
15AH	15	135	28	94x38	156		197x38x39
16AH	16	144	28	100x38	160		208x38x39

* Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29

- Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
 - Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
 - Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum
- See website for more information.

SH Safety Angle Mobile Ladder Stands*



3SH

Diamond Channel Grating



DCG-H 7-1/2" deep tread standard
DCG-SH 9-1/2" deep tread for safety ladders

- 50° safety angle ladder allows user to face forward while descending
- 1" x 16 ga. round tube construction
- 42" high handrail
- 19" platform depth
- Positive floor locking trip step mechanism
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- 2SH – 5H ship fully assembled;
6SH – 16SH ship knocked down
- Durable blue powder coat finish

OPTIONS:

~ Front or side walk-through
 (comes with safety chains or gate)

~ Extended platform
 ~ Fold-down handrail

Please call for details.

Parts for 2SH – 3SH ladders



CAS-3TPR-SET
 3" swivel spring-loaded caster, c/w spring & cotter pin

4SH – 16SH ladders



CAS-5RSX-TS
 5RSX swivel c/w threaded stem

Parts for SH ladders

RP2534: Rubber Pad assembly



Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.)	Weight (lbs.)	Wheel/Caster Type & Size (in.)	Shipping Size (in.) LxWxH
2SH	2	20	24	31x28	50	3" spring-loaded non-marking casters	31x28x62
3SH	3	30	24	41x28	65		41x28x72
4SH	4	40	24	53x34	105		53x34x82
5SH	5	50	24	59x34	120	5" rubber casters 6" polyolefin wheels	59x34x92
6SH	6	60	24	69x34	135		116x34x47
7SH	7	70	24	76x34	145		129x34x47
8SH	8	80	28	86x38	175	5" rubber casters 8" polyolefin wheels	142x38x47
9SH	9	90	28	94x38	205		155x38x47
10SH	10	100	28	102x38	230		168x38x47
11SH	11	110	28	109x38	250		181x38x47
12SH	12	120	28	119x38	270		195x38x47
13SH	13	130	28	128x38	290		208x38x47
14SH	14	140	28	136x38	315		221x38x47
15SH	15	150	28	144x44	340		234x44x47
16SH	16	160	28	153x46	365		247x46x47

- * Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
 • Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
 • Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
 • Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum
 See website for:
 • Ladder Assembly Instructions and User Guide
 • Schematic Drawings with dimensions and isometric view
 • Canway Certification Statement covering Mobile Ladder Stands

Shipping Details:

1-5 step ladders ship fully assembled.
 6 step and larger ladders ship knocked down.
 Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.

- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR


♦ Stock item

SH-SS Stainless Steel Safety Angle Mobile Ladder Stands*

- 50° safety angle ladder
- 1" stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 42" high handrail
- 19" platform depth
- Positive floor locking trip-step mechanism
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lbs. capacity
- 2SH-SS – 5H-SS ship fully assembled; 6SH-SS – 16SH-SS ship knocked down
- All components except casters and springs are fabricated from high quality stainless steel

OPTIONS:

- ~ Front or side walk-through (comes with safety chains or gate)
 - ~ Extended platform
 - ~ Fold-down handrail
 - ~ 316 #4 brushed finish
- Please call for details.*

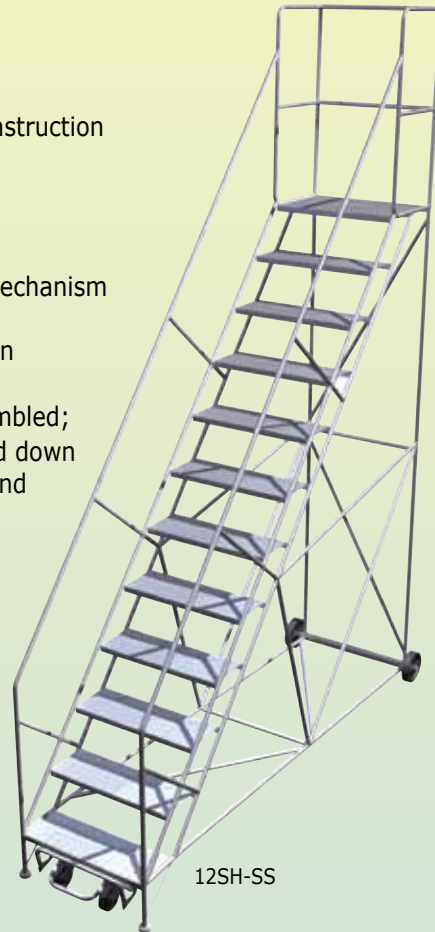


12SH-SS



5SH-SS

Diamond Channel Grating



DCG-H 7-1/2" deep tread standard
DCG-SH 9-1/2" deep tread for safety ladders

Wheel Description

For all wheel & caster info & details, please see Section 13.



◆ 6PO

6" polyolefin wheel (4-7SH-SS ladders)




◆ 8PO


8" polyolefin wheel (8-16SH-SS ladders)

Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.) LxW	Weight (lbs.)	Wheel/Caster Type & Size (in.)	Shipping Size (in.) LxWxH
2SH-SS	2	20	24	31x28	50	3" spring-loaded non-marking casters	31x28x62
3SH-SS	3	30	24	41x28	65		41x28x72
4SH-SS	4	40	24	53x34	105		53x34x82
5SH-SS	5	50	24	59x34	120		59x34x92
6SH-SS	6	60	24	69x34	135		116x34x47
7SH-SS	7	70	24	76x34	145	5" rubber casters 8" polyolefin wheels	129x34x47
8SH-SS	8	80	28	86x38	175		142x38x47
9SH-SS	9	90	28	94x38	205		155x38x47
10SH-SS	10	100	28	102x38	230		168x38x47
11SH-SS	11	110	28	109x38	250		181x38x47
12SH-SS	12	120	28	119x38	270		195x38x47
13SH-SS	13	130	28	128x38	290		208x38x47
14SH-SS	14	140	28	136x38	315		221x38x47
15SH-SS	15	150	28	144x44	340		234x44x47
16SH-SS	16	160	28	153x46	365		247x46x47


Parts for 2-3SH-SS ladders



Parts for 4-16SH-SS ladders



Parts for SH-SS ladders



- * • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
 • Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
 • Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
 • Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:

- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands



HR RIP Mobile Ladder Stands*

- Rotates in Place (RIP) to reduce turning radius in tight situations
- 1" x 16 ga. round tube construction
- 42" high handrail
- 15" platform depth
- Positive floor locking trip step mechanism
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- Ships knocked down – assembly required
- Durable blue powder coat finish

Diamond Channel Grating



DCG-H 7-1/2" deep tread standard
DCG-SH 9-1/2" deep tread for safety ladders

OPTIONS:

- ~ Front or side walk-through (comes with safety chains or gate)
- ~ Extended platform ~ Fold-down handrail *Please call for details.*

Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.) LxW	Weight (lbs.)	Wheel/Caster Type & Size (in.)	Shipping Size (in.) LxWxH
6HR	6	54	28	46x36	165	5" rubber casters 8" polyolefin wheels	103x36x37
7HR	7	63	28	50x36	180		110x36x37
8HR	8	72	28	56x37	205		125x37x37
9HR	9	81	28	62x37	220		136x37x37
10HR	10	90	28	67x37	240		147x37x37
11HR	11	99	28	71x37	255		157x37x37
12HR	12	108	28	78x37	270		166x37x37
13HR	13	117	28	83x37	290		177x37x37
14HR	14	126	28	87x37	310		187x37x37
15HR	15	135	28	92x37	330		197x37x37
16HR	16	144	28	98x37	355		208x37x37

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ **8PO**
 8" polyolefin wheel (8-16HR ladders)

HR & HR-SS ladder parts

♦ **RP2534:** Rubber Pad assembly



♦ **CAS-5RSX-TS**
 5RSX swivel c/w threaded stem



HR-SS Stainless Steel RIP Mobile Ladder Stands*

- Rotates in Place (RIP) to reduce turning radius in tight situations
- 1" stainless steel round tube construction
- Clean room finish
- 42" high handrail
- 5" x 1-1/4" RSX rubber swivel casters
- Positive floor locking trip step mechanism
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 15" platform depth
- 400 lb. capacity
- All components except casters and springs are fabricated from high quality stainless steel
- Ships knocked down - assembly required

OPTIONS:

- ~ Front or side walk-through (comes with safety chains or gate)
- ~ Extended platform ~ Fold-down handrail *Please call for details.*

Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.) LxW	Weight (lbs.)	Wheel/Caster Type & Size (in.)	Shipping Size (in.) LxWxH
6HR-SS	6	54	28	46x36	165	5" rubber casters 8" polyolefin wheels	103x36x37
7HR-SS	7	63	28	50x36	180		110x36x37
8HR-SS	8	72	28	56x37	205		125x37x37
9HR-SS	9	81	28	62x37	220		136x37x37
10HR-SS	10	90	28	67x37	240		147x37x37
11HR-SS	11	99	28	71x37	255		157x37x37
12HR-SS	12	108	28	78x37	270		166x37x37
13HR-SS	13	117	28	83x37	290		177x37x37
14HR-SS	14	126	28	87x37	310		187x37x37
15HR-SS	15	135	28	92x37	330		197x37x37
16HR-SS	16	144	28	98x37	355		208x37x37

Shipping Details:

1-5 step ladders ship fully assembled.
 6 step and larger ladders ship knocked down.
 Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.

- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR

- * • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
- Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
- Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
- Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:

- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands


♦ Stock item

SHR RIP Safety Angle Mobile Ladder Stands*



- Rotates in Place (RIP) to reduce turning radius in tight situations
- 50° safety angle ladder
- 1" x 16 ga. round tube construction
- 42" high handrail
- 19" platform depth
- Positive floor locking trip step mechanism
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- Ships knocked down – assembly required
- Durable blue powder coat finish

Diamond Channel Grating



DCG-H 7-1/2" deep tread for standard ladders
DCG-SH 9-1/2" deep tread for safety ladders

OPTIONS:

- ~ Front or side walk-through (comes with safety chains or gate)
- ~ Extended platform ~ Fold-down handrail *Please call for details.*

Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.) LxW	Weight (lbs.)	Wheel/Caster Type & Size (in.)	Shipping Size (in.) LxWxH
6SHR	6	60	28	66x37	190	5" rubber casters 8" polyolefin wheels	118x37x41
7SHR	7	70	28	72x37	215		131x37x41
8SHR	8	80	28	81x37	240		144x37x41
9SHR	9	90	28	89x37	265		157x37x41
10SHR	10	100	28	97x37	290		170x37x41
11SHR	11	110	28	105x37	315		183x37x41
12SHR	12	120	28	114x37	330		197x37x41
13SHR	13	130	28	123x37	350		210x37x41
14SHR	14	140	28	133x37	365		223x37x41
15SHR	15	150	28	139x37	385		236x37x41
16SHR	16	160	28	148x37	405		249x37x41

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ **8PO**
8" polyolefin wheel (8-16SHR ladders)

SHR & SHR-SS ladder parts

♦ **RP2534:** Rubber Pad assembly



♦ **CAS-5RSX-TS**
5RSX swivel c/w threaded stem



SHR-SS Stainless Steel RIP Mobile Ladder Stands*

- Rotates in Place (RIP) to reduce turning radius in tight situations
- 1" stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 50° safety angle ladder
- 42" high handrail
- 19" platform depth
- Positive floor locking trip step mechanism
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- All components except casters and springs are fabricated from high quality stainless steel
- Ships knocked down – assembly required

OPTIONS:

- ~ Front or side walk-through (comes with safety chains or gate)
 - ~ Extended platform
 - ~ Fold-down handrail
 - ~ 316 #4 brushed finish
- Please call for details.*

Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.) LxW	Weight (lbs.)	Wheel/Caster Type & Size (in.)	Shipping Size (in.) LxWxH
6SHR-SS	6	60	28	66x37	190	5" rubber casters 8" polyolefin wheels	118x37x41
7SHR-SS	7	70	28	72x37	215		131x37x41
8SHR-SS	8	80	28	81x37	240		144x37x41
9SHR-SS	9	90	28	89x37	265		157x37x41
10SHR-SS	10	100	28	97x37	290		170x37x41
11SHR-SS	11	110	28	105x37	315		183x37x41
12SHR-SS	12	120	28	114x37	330		197x37x41
13SHR-SS	13	130	28	123x37	350		210x37x41
14SHR-SS	14	140	28	133x37	365		223x37x41
15SHR-SS	15	150	28	139x37	385		236x37x41
16SHR-SS	16	160	28	148x37	405		249x37x41

- * • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
- Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
- Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
- Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:

- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

ML – Mechanic's Ladder*



Shelf Detail

- Tilt and roll mobility
- 1" x 16 ga. round tube construction
- 24" wide x 22-1/2" deep platform
- 7-1/2" deep, non-slip, perforated steps
- 26" wide x 10" deep removable tool shelf
- Two 5" diameter rubber wheels
- 400 lb. capacity
- Durable blue powder coat finish

Part Number	No. of Steps	Platform Height (in.)	Base Size (in.) LxW	Overall Height (in.)	Weight (lbs.)	Shipping Size (in.) LxWxH
ML-3H	3	27	44x28	69	85	44x28x69
ML-4H	4	36	48x28	78	95	48x28x78
ML-5H	5	45	52x28	87	105	52x28x87
ML-6H	6	54	56x28	96	115	56x28x96



ML-4H

TR- Tilt and Roll Ladder*

- Tilt and roll into position
- 1" x 16 ga. round tube construction
- Extra large platform 24" wide x 22-1/2" deep
- Ladder rolls on two 5" diameter rubber wheels
- Rests on four 2-1/2" diameter rubber pads to secure ladder to floor during use
- 42" high handrail
- 24" wide x 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 22-1/2" platform depth
- 400 lb capacity
- Durable blue powder coat finish


Part Number	No. of Steps	Platform Height (in.)	Base Size (in.)	Overall Height (in.)	Weight (lbs.)	Shipping Size (in.) LxWxH
2H-TR	2	18	40x28	61	51	40x28x61
3H-TR	3	27	44x28	70	65	44x28x70
4H-TR	4	36	47x28	78	80	47x28x78
5H-TR	5	45	51x28	87	95	51x28x87
6H-TR	6	54	55x28	96	110	55x28x96



5H-TR

ML & TR ladder parts

◆ WHL-5RSX wheel



◆ RP2534: Rubber Pad assembly



- * • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
- Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
 - Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
 - Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:

- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

◆ Stock item

2NH Tilt 'n' Roll*

- Allows for easy maneuvering of ladder
- 5"x1-1/4" rubber rigid wheels mounted on left side
- 2 step ladder, with platform
- 4 heavy duty rubber grip pads for secure footing
- 43" upright handle
- Heavy duty all-welded construction
- Durable blue powder coat finish

Part Number	No. of Steps	Platform Height (in.)	Step Width	Base Size (in.)	Weight (lbs.)	Shipping Size (in.) LxWxH
2NH-TR	2	18	24	33x24	37	24x43x34



Ladder parts for this page and next

♦ WHL-5RSX wheel



♦ RP2534: Rubber Pad assembly



3LNS

Lock 'n' Stock*

- Easy to maneuver
- Heavy duty all-welded construction
- 16" x 7-1/2" deep non-slip raised, perforated, dimpled tread pattern
- Locks when in the climbing position
- Folds to 10" deep and locks for compact storage
- 4 heavy duty rubber grip pads for secure footing
- 400 lb. capacity
- Durable blue powder coat finish

Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.)	Weight (lbs.)	Wheel Type & Size	Shipping Size (in.) LxWxH
2LNS	2	20	16	17x22	27	5" rubber wheel	23x11x45
3LNS	3	30	16	24x22	35		23x11x57
4LNS	4	40	16	31x22	43		23x11x69

Step Stool*

- Lightweight 2 step stool
- 20" x 9-1/2" platform
- 18" top step height
- Non-slip raised, perforated, dimpled tread pattern
- 50° safety angle incline
- Heavy duty all-welded aluminum or steel construction
- Robust grey glides for secure footing
- Durable blue powder coat finish



2NH-ST

Shipping Details:

1-5 step ladders ship fully assembled. 6 step and larger ladders ship knocked down. Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.

- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR

Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.)	Weight (lbs.)	Shipping Size (in.) LxWxH
2NH-ST	2	18	20	22x20	20.5	20x22x18
2ANH-ST	2	18	20	22x20	9	20x22x18

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
 • Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
 • Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
 • Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum



Trailer Access Ladder*

- Provides a secure access to tractor and cube vans
- 24" x 22-1/2" platform
- 50° safety angle ladder allows user to face forward while descending
- Front walk through with safety chains
- Heavy duty all-welded construction
- 400 lb. capacity
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 10" flat free wheels
- Durable blue powder coat finish

Shipping Details:

1-5 step ladders ship fully assembled.
6 step and larger ladders ship knocked down.
Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.

- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR

Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.)	Weight (lbs.)	Wheel/Caster Type & Size (in.)	Shipping Size (in.) WxLxH
4SH-TAL	4	40	24	34x56	112	10" flat-free wheels	34x56x82
5SH-TAL	5	50	24	33x64	125		32x65x92
6SH-TAL	6	60	24	34x73	138		34x73x102

Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ 10FF

10" flat free polyurethane

Lever Lift Mobile Ladder Stands*

- Unique lever lift action for easy maneuvering
- 1" x 16 ga. round tube construction
- 42" high handrail
- 15" platform depth
- Heavy duty all-welded construction
- 400 lb. capacity
- Ships knocked down – assembly required
- Durable blue powder coat finish

H-LL

- 60° incline angle
- 15" platform depth
- 7-1/2" deep, non-slip raised, perforated, dimpled tread pattern

SH-LL

- 50° incline angle
- 19" platform depth
- 9-1/2" deep, non-slip raised, perforated, dimpled tread pattern

OPTION: Fold-down handrail



Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.)	Weight (lbs.)	Caster Type & Size (in.)	Shipping Size (in.) LxWxH
4H-LL	4	36	24	37x34	85	4" rubber casters	37x34x78
5H-LL	5	45	24	43x34	95		43x34x87
6H-LL	6	54	24	48x34	115		102x34x39
7H-LL	7	63	24	53x34	125		110x34x39
8H-LL	8	72	28	59x38	150	5" rubber casters	124x38x39
9H-LL	9	81	28	65x38	170		136x38x39
10H-LL	10	90	28	70x38	175		144x38x39
11H-LL	11	99	28	75x38	180		155x38x39
12H-LL	12	108	28	81x38	200		166x38x39
13H-LL	13	117	28	86x38	215		177x38x39
14H-LL	14	126	28	89x38	250		187x38x39
15H-LL	15	135	28	94x38	260		197x38x39
16H-LL	16	144	28	100x38	270		208x38x39
4SH-LL	4	40	24	53x34	105	4" rubber casters	53x34x47
5SH-LL	5	50	24	59x34	120		59x34x47
6SH-LL	6	60	24	69x34	135		116x34x47
7SH-LL	7	70	24	76x34	145		129x34x47
8SH-LL	8	80	28	86x38	175	5" rubber casters	142x38x47
9SH-LL	9	90	28	94x38	205		155x38x47
10SH-LL	10	100	28	102x38	230		168x38x47
11SH-LL	11	110	28	109x38	250		181x38x47
12SH-LL	12	120	28	119x38	270		195x38x47
13SH-LL	13	130	28	128x38	290		208x38x47
14SH-LL	14	140	28	136x38	315		221x38x47
15SH-LL	15	150	28	144x44	340		234x44x47
16SH-LL	16	160	28	153x46	365		247x46x47

- * • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:

- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item



4SH-RWP

Rolling Work Platforms*

- Extra Large platform fits 2 people and equipment.
- 50° safety angle ladder allows user to face forward while descending
- 36" x 36" platform size
- Positive floor locking trip step mechanism
- Heavy duty all-welded construction
- 9-1/2" deep non-slip diamond channel grating tread
- Complies with OSHA and ANSI standards
- 800 lb. capacity
- Ships fully assembled
- Durable blue powder coat finish

◆ **RP2534:** Rubber Pad assembly



◆ **CAS-5RSX-TS**
5RSX swivel
c/w threaded
stem



Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.)	Weight (lbs.)	Caster Type & Size (in.)	Shipping Size (in.) LxWxH
3SH-RWP	3	30	36	46x62	105	5" rubber casters	62x46x72
4SH-RWP	4	40	36	46x70	124		70x46x82
5SH-RWP	5	50	36	46x78	143		78x46x92

Ladder Options

Tool Tray

- Removable work tray for additional working area
- Available on all ladders with handrails
- 10" by 26" or 30" workable area.




TT26

Part Number	Tray Size	Capacity (lb.)	Weight (in.)	Shipping Size LxWxH (in.)
TT26	10x26	100	8	26x13x13
TT30	10x30	100	10	30x13x13
TT38	10x38	100	15	38x13x13

Diamond Channel Grating

- 7-1/2" deep (DCG-H) for standard ladders or 9-1/2" deep (DCG-SH) non-slip tread for safety ladders
- Durable blue powder coat finish

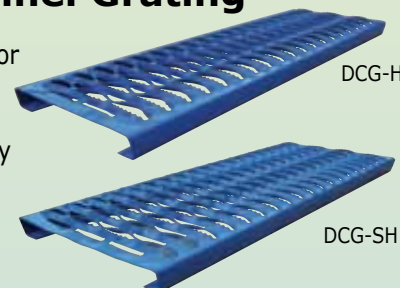

DCG-H

DCG-SH

Gated Walk-through Options on H Series Ladders

- Allows for easy access to platforms and other raised surfaces.
- Available with safety chains or a gate
- Front, left, or right walk-through available
- Side walk-through ladders have an extended platform



FWT Double Gate



LWT Single Gate

Vertical Pickets

- For retail applications



Fold-down Handrail





Control Switch



9H-ESL

ESL Electric Mobile Ladder Stands*

- 12 volt low maintenance Dry Cell Battery c/w onboard charger system
- Upgraded heavy duty WARN 1200 Series industrial winch
- Industrial contact limit switches at top and bottom position for additional safety
- Requires 110 volt duplex power outlet for battery charger (not included)
- Power system only requires battery terminal cables to be connected at time of assembly
- Heavy duty 300 lb. capacity cargo shelf, 30" x 30"
- Integral shelf column mounted vertically on back of ladder stand c/w extended reinforced chassis
- 1" x 16 ga. round tube construction
- 42" high handrail
- 22-1/2" platform depth
- Two 5" x 1-1/4" RSX rubber swivel casters and two 6" x 2" mold on rubber casters
- Positive floor locking trip step mechanism
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- Durable blue powder coat finish
- Modular knock down "KD" construction for compact shipping



Winch & Battery Detail

Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.) LxW	Weight (lbs.)	Shipping Size (in.) LxWxH
7H-ESL	7	63	28	87x36	455	113x36x61
8H-ESL	8	72	28	92x36	465	127x36x61
9H-ESL	9	81	28	97x36	485	137x36x61
10H-ESL	10	90	28	102x36	515	148x36x61
11H-ESL	11	99	28	107x36	535	158x36x61
12H-ESL	12	108	28	114x36	555	169x36x61

- * • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
 • Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
 • Maximum rated load: 400 lbs (one person only)

See website for:

- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

ESL ladder parts

- ♦ **CAS-5RSX-TS**
5RSX swivel c/w threaded stem



- ♦ **RP2534:** Rubber Pad assembly



Caster Description

For all wheel & caster info & details, please see Section 13.



- ♦ **6MR**
6" molded rubber caster



10H-MSL

MSL Manual Mobile Ladder Stands*

- Heavy duty 300 lb. capacity cargo shelf, 30" x 30"
- Integral shelf column mounted vertically on back of ladder stand c/w extended reinforced chassis
- 1" x 16 ga. round tube construction
- 42" high handrail
- 22-1/2" platform depth
- Two 5" x 1-1/4" RSX rubber swivel casters and two 6" x 2" mold on rubber casters
- Positive floor locking trip step mechanism
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- Durable blue powder coat finish
- Modular knock down "KD" construction for compact shipping



Platform Detail



Shipping Position


Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.) LxW	Weight (lbs.)	Shipping Size (in.) LxWxH
7H-MSL	7	63	28	87x36	355	113x36x61
8H-MSL	8	72	28	92x36	365	127x36x61
9H-MSL	9	81	28	97x36	385	137x36x61
10H-MSL	10	90	28	102x36	415	148x36x61
11H-MSL	11	99	28	107x36	435	158x36x61
12H-MSL	12	108	28	114x36	455	169x36x61

MSL ladder parts

- ♦ **CAS-5RSX-TS**
5RSX swivel
c/w threaded
stem



- ♦ **RP2534:** Rubber
Pad assembly



Wheel Description

For all wheel & caster info & details, please see Section 13.



- ♦ **6MR**
6" molded rubber
caster


- * • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Maximum rated load: 400 lbs (one person only)

See website for:

- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

Crossover Ladder - 60°

- Provides safe walkway over conveyors, machinery, pipes, and other obstacles
- 1" x 16 ga. round tube construction
- Standard perforated, raised, dimpled step
- 60° standard slope
- 400 lb. capacity
- Ships fully assembled
- Durable blue powder coat finish

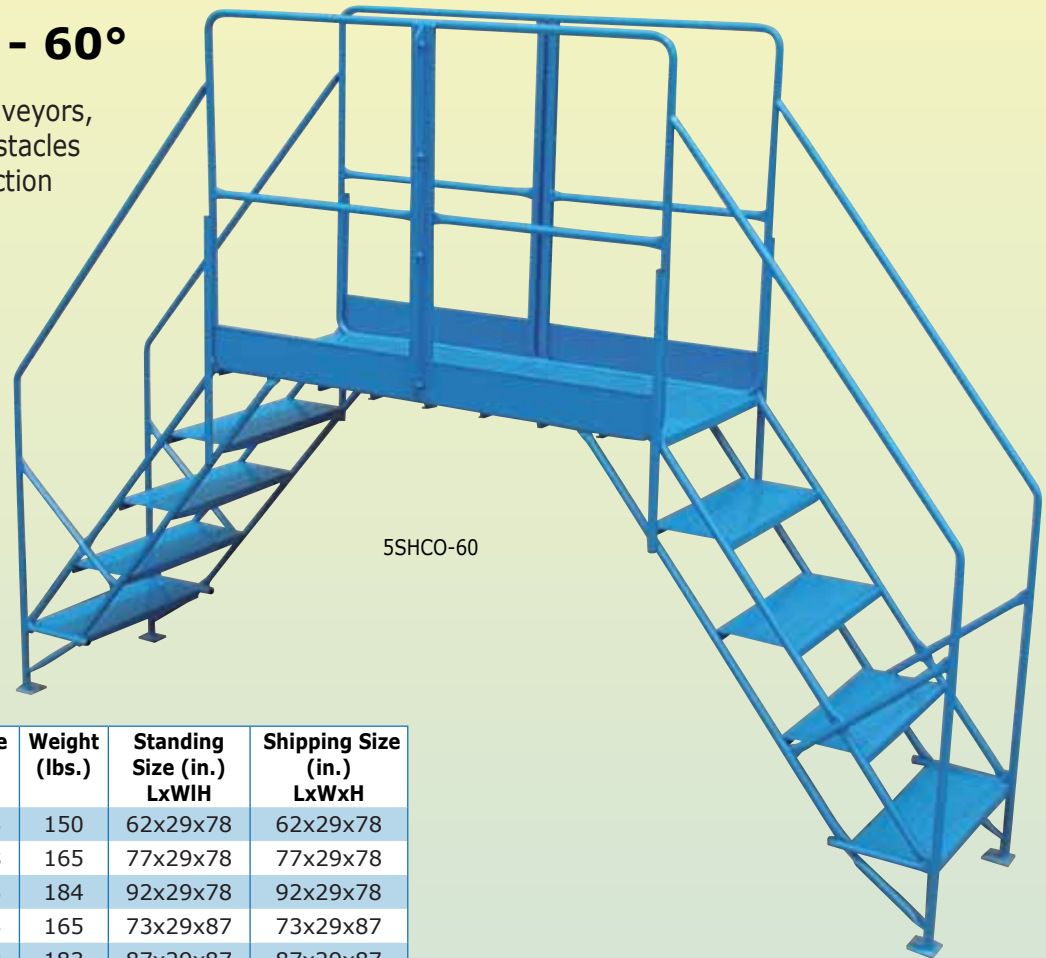

5SHCO-60

Part Number	No. of Steps	Platform Size (in.) LxW	Clearance (in.) HxW	Weight (lbs.)	Standing Size (in.) LxWxH	Shipping Size (in.) LxWxH
4HCO-30	4	30x24	34.5x13	150	62x29x78	62x29x78
4HCO-45	4	45x24	34.5x28	165	77x29x78	77x29x78
4HCO-60	4	60x24	34.5x43	184	92x29x78	92x29x78
5HCO-30	5	30x24	43.5x13	165	73x29x87	73x29x87
5HCO-45	5	45x24	43.5x28	183	87x29x87	87x29x87
5HCO-60	5	60x24	43.5x43	201	102x29x87	102x29x87
6HCO-30	6	30x24	52.5x13	181	83x29x96	83x29x96
6HCO-45	6	45x24	52.5x28	199	98x29x96	98x29x96
6HCO-60	6	60x24	52.5x43	218	113x29x96	113x29x96

Crossover Ladder - 50°

- Provides safe walkway over conveyors, machinery, pipes, and other obstacles
- 1" x 16 ga. round tube construction
- Standard perforated, raised, dimpled step
- 50° standard slope
- 400 lb. capacity
- Ships fully assembled
- Durable blue powder coat finish

Part Number	No. of Steps	Platform Size (in.) WxL	Clearance (in.) HxW	Weight (lbs.)	Standing Size (in.) LxWxH	Shipping Size (in.) LxWxH
4SHCO-30	4	30x24	38.5x10	161	85x29x82	85x29x82
4SHCO-45	4	45x24	38.5x25	179	100x29x82	100x29x82
4SHCO-60	4	69x24	38.5x40	198	115x29x82	115x29x82
5SHCO-30	5	30x24	48.5x10	181	98x29x92	98x29x92
5SHCO-45	5	45x24	48.5x25	218	128x29x92	128x29x92
5SHCO-60	5	60x24	48.5x40	210	129x29x92	129x29x92
6SHCO-30	6	30x24	58.5x10	201	116x29x107	116x29x107
6SHCO-45	6	45x24	58.5x25	219	131x29x102	131x29x102
6SHCO-60	6	60x24	58.5x40	237	146x29x102	146x29x102

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29

• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851

• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only

• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:

• Ladder Assembly Instructions and User Guide

• Schematic Drawings with dimensions and isometric view

• Canway Certification Statement covering Mobile Ladder Stands




6SH-CL-19-6PH

Cantilever Mobile Ladder Stands

- Cantilever design allows access to hard-to-reach areas
- 50° safety angle ladder allows user to face forward while descending
- 1" x 16 ga. round tube construction
- 42" high handrail
- 19" platform depth
- Four 6" phenolic casters, 2 swivel with total lock brake and 2 rigid
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- Ships knocked down
- Durable blue powder coat finish

Diamond Channel Grating



DCG-H 7-1/2" deep tread standard
DCG-SH 9-1/2" deep tread for safety ladders



14SH-CL-47-6PH

Caster Description

For all wheel & caster info & details, please see Section 13.



6PH
6" phenolic caster

	Part Number	No. of Steps	Overhang Clearance HxD (in.)	Platform Height (in.)	Overall Dimensions (in.) LxWxH	Shipping Size (in.) LxWxH
19" Overhang	6SH-CL-19	6	58x16.5	60	81x39x103	116x39x79
	7SH-CL-19	7	68x16.5	70	89x39x113	129x39x79
	8SH-CL-19	8	78x16.5	80	98x39x123	142x39x79
	9SH-CL-19	9	88x16.5	90	106x39x133	155x39x79
	10SH-CL-19	10	98x16.5	100	114x39x143	168x39x79
	11SH-CL-19	11	108x16.5	110	123x39x153	181x39x79
	12SH-CL-19	12	118x16.5	120	131x39x163	194x39x79
	13SH-CL-19	13	128x16.5	130	140x39x173	207x39x79
	14SH-CL-19	14	138x16.5	140	148x39x183	220x39x79
28.5" Overhang	6SH-CL-28	6	58x26	60	90x39x103	125x39x79
	7SH-CL-28	7	68x26	70	99x39x113	138x39x79
	8SH-CL-28	8	78x26	80	107x39x123	151x39x79
	9SH-CL-28	9	88x26	90	116x39x133	164x39x79
	10SH-CL-28	10	98x26	100	124x39x143	177x39x79
	11SH-CL-28	11	108x26	110	132x39x153	190x39x79
	12SH-CL-28	12	118x26	120	141x39x163	203x39x79
	13SH-CL-28	13	128x26	130	149x39x173	216x39x79
	14SH-CL-28	14	138x26	140	157x39x183	229x39x79
38" Overhang	6SH-CL-38	6	58x35.5	60	100x39x103	134x39x79
	7SH-CL-38	7	68x35.5	70	108x39x113	147x39x79
	8SH-CL-38	8	78x35.5	80	117x39x123	160x39x79
	9SH-CL-38	9	88x35.5	90	125x39x133	173x39x79
	10SH-CL-38	10	98x35.5	100	133x39x143x	186x39x79
	11SH-CL-38	11	108x35.5	110	142x39x153	199x39x79
	12SH-CL-38	12	118x35.5	120	150x39x163	212x39x79
	13SH-CL-38	13	128x35.5	130	159x39x173	225x39x79
	14SH-CL-38	14	138x35.5	140	167x39x183	238x39x79
47.5" Overhang	6SH-CL-47	6	58x45	60	109x39x103	143x39x79
	7SH-CL-47	7	68x45	70	118x39x113	156x39x79
	8SH-CL-47	8	78x45	80	126x39x123	169x39x79
	9SH-CL-47	9	88x45	90	135x39x133	182x39x79
	10SH-CL-47	10	98x45	100	143x39x143	195x39x79
	11SH-CL-47	11	108x45	110	151x39x153	208x39x79
	12SH-CL-47	12	118x45	120	160x39x163	221x39x79
	13SH-CL-47	13	128x45	130	168x39x173	234x39x79
	14SH-CL-47	14	138x45	140	176x39x183	247x39x79

Shipping Details:

1-5 step ladders ship fully assembled.
 6 step and larger ladders ship knocked down.
 Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.

- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR

RDL Rolling Dock Ladder

- Safe alternative for sealing and unsealing open top shipping containers
- Extendable platform c/w incremental locking pin
- Compact side wall mount design "Easy Roll" track system to maintain optimum clearance
- Typically installed in pairs for optimum efficiency when in use
- Special orders available for unique applications



BAP – Bus Access Platform

- Provides safe, enclosed work area for roof-top access and maintenance
- Lockable swing gates
- Platform includes heavy-duty phenolic swivel caster c/w foot brakes and 24" adjustable outriggers for optimal stability
- Electric shelf lift for battery maintenance and replacement
- 12 volt low maintenance dry cell battery c/w onboard charger system
- Upgraded heavy duty WARN 1200 Series industrial winch
- Industrial contact limit switches at top and bottom position for additional safety
- Requires 110 volt duplex power outlet for battery charger (not included)
- Power system only requires battery terminal cables to be connected at time of assembly
- Heavy duty 300 lbs. capacity cargo shelf
- Integral shelf column mounted vertically on back of ladder stand, c/w extended reinforced chassis



Top View

Narrow Aisle Mobile Ladder Stand




7H-20

- Narrow rolling ladder allows user to navigate through narrow aisles
- Overall width of 30-1/4"
- 1" x 16 ga. round tube construction
- 42" high handrail
- 15" platform depth
- Positive floor locking trip step mechanism
- 7-1/2" deep non-slip raised, perforated, dimpled tread pattern
- Heavy duty all-welded construction
- 400 lb. capacity
- Durable blue powder coat finish


OPTIONS:

~ Locking swivel casters
Please call for details.


Parts for 1H – 3H ladders

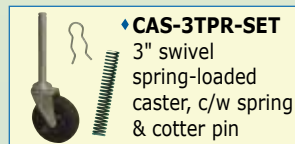

Parts for 4H – 10H ladders



Parts for all H ladders



Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ 6PO

6" polyolefin wheel
(4H-7H ladders)



♦ 8PO

8" polyolefin wheel
(8H-20H ladders)

Part Number	No. of Steps	Platform Height (in.)	Step Width (in.)	Base Size (in.) LxW	Weight (lb.)	Caster Type and Size	Shipping Size (in.) LxWxH
3H-20	3	27	20	31x24	55	3" spring-loaded non-marking casters	31x24x69
4H-20	4	36	20	39x30-1/4	80	5" rubber caster 6" polyolefin wheels	39x31x78
5H-20	5	45	20	45x30-1/4	90		45x31x87
6H-20	6	54	20	50x30-1/4	105		102x31x39
7H-20	7	63	20	55x30-1/4	115	5" rubber caster 8" polyolefin wheels	110x31x39
8H-20	8	72	20	61x30-1/4	120		124x31x39
9H-20	9	81	20	66x30-1/4	135		136x31x39
10H-20	10	90	20	72x30-1/4	142		144x31x39

Quick Find CASTER Chart



Black Rubber
P 13.1



Blue Rubber
P 13.1



**Crown/Flat
Cast Iron**
P 13.1



Cushion Rubber
P 13.1



**Flat Free
Polyurethane**
P 13.1



**Molded Rubber
Cast Iron Core**
P 13.2



Pneumatic Resin
P 13.2



Pneumatic
13.2



Polyolefin P 13.3



Polyurethane
P 13.3



Soft Tread P 13.3



**Urethane on Cast
Core** P 13.3

Black Rubber



3HD TS

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
3HD TS	3	1-1/4	3-3/16	2-3/4	250	Self-lube	1-1/2

Blue Rubber

4RSX

5RSX-RG

5RSX-SW



5RSX

5RSX-SW/L

6RSX-RG



6RSX-RG



Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
4RSX-RG	4	1-1/4	6	—	200	Roller	1-1/2
4RSX-SW	4	1-1/4	6	4	200	Roller	2
4RSX-SW/L	4	1-1/4	6	4	200	Roller	2
5RSX-RG	5	1-1/4	6-1/8	—	300	Roller	2
5RSX-SW	5	1-1/4	6-1/8	4-1/8	300	Roller	2-1/2
5RSX-SW/L	5	1-1/4	6-1/8	4-1/8	300	Roller	3
5RSX-STEM	5	1-1/4	6-1/8	4-1/8	300	Roller	2
6RSX-RG	6	1-3/4	7-3/4	—	500	Roller	4
6RSX-SW	6	1-3/4	7-3/4	5-3/4	500	Roller	5-1/2
6RSX-SW/L	6	1-3/4	7-3/4	5-3/4	500	Roller	6

Cast Iron

Flat Cast Iron Caster



6CIF



8CIF

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
6CIF-RG	6	2	7-1/2	—	900	Roller	—
6CIF-SW	6	2	7-1/2	5	900	Roller	—
8CIF-RG	8	2	9-1/2	—	1000	Roller	—
8CIF-SW	8	2	9-1/2	6-1/2	1000	Roller	—
6CIC-RG	6	2	7-1/2	—	900	Roller	—
6CIC-SW	6	2	7-1/2	5	900	Roller	—
8CIC-RG	8	2	9-1/2	—	1000	Roller	—
8CI-CSW	8	2	9-1/2	6-1/2	1000	Roller	—

Crown Cast Iron Caster

Cushion Rubber



8C

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
5C-RG	5	2	6-1/2	—	500	Ball	4-1/2
5C-SW	5	2	6-1/2	4-1/4	500	Ball	4-1/2
6C-RG	6	2	7-1/2	—	600	Ball	4-3/4
6C-SW	6	2	7-1/2	5	600	Ball	4-3/4
8C-RG	8	2	9-1/2	—	675	Ball	5
8C-SW	8	2	9-1/2	6-1/2	675	Ball	5

Flat Free Polyurethane		Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
 8FF 10FF	8FF-RG	8	4	10	—	300	Roller	7	
	8FF-SW	8	4	10	6-3/4	300	Roller	7-1/2	
	10FF-RG	10	4	12	—	300	Roller	8	
	10FF-SW	10	4	12	8-1/4	300	Roller	8-1/2	

Molded Rubber on Cast Iron Core			Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
 5MR-SW 6MR-SW 8MR-SW	5MR-RG	5	2	6-1/2	—	400	Roller	5		
	5MR-SW	5	2	6-1/2	4-1/4	400	Roller	5-1/2		
	6MR-RG	6	2	7-1/2	—	450	Roller	6-1./2		
	6MR-SW	6	2	7-1/2	5	450	Roller	7		
	8MR-RG	8	2	9-1/2	—	525	Roller	7-1/2		
	8MR-SW	8	2	9-1/2	6-1/2	525	Roller	8-1/4		

Natural Rubber Precision Bearing			Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
 5NRPB-RG	 5NRPB-SW	 5NRPB-SW/L	5NRPB-RG	5	2	6-1/2	—	500	Precision Ball Bearings	3-1/2
			5NRPB-SW	5	2	6-1/2	4	500	Precision Ball Bearings	4-1/4
			5NRPB-SW/L	5	2	6-1/2	4	550	Precision Ball Bearings	5

Phenolic Resin			Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
4PH-SW	5PH-SW	6PH-SW	4PH-RG	4	2	5-5/8	—	800	Roller	4
			4PH-SW	4	2	5-5/8	3-1/2	800	Roller	4
			5PH-RG	5	2	6-1/2	—	900	Roller	4-1/2
			5PH-SW	5	2	6-1/2	4-1/4	900	Roller	5

Quick Find CASTER Chart



Black Rubber P 13.1



Blue Rubber P 13.1



Crown/Flat Cast Iron P 13.1



Cushion Rubber P 13.1



Flat Free Polyurethane P 13.1



Molded Rubber Cast Iron Core P 13.2



Pneumatic P 13.2



Phenolic Resin P 13.2



Polyolefin P 13.3



Polyurethane P 13.3



Soft Tread P 13.3



Urethane on Cast Core P 13.3

Phenolic Resin (cont'd)



8PH-SW

4PHL-SW

5PHL-SW

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
6PH-RG	6	2	7-1/2	—	900	Roller	5-1/2
6PH-SW	6	2	7-1/2	5	900	Roller	6
8PH-RG	8	2	9-1/2	—	1000	Roller	8-1/2
8PH-SW	8	2	9-1/2	6-1/2	1000	Roller	9
4PHL-RG	4	1-1/2	5	—	350	Plain	3
4PHL-SW	4	1-1/2	5	3-1/2	350	Plain	3-1/2
5PHL-RG	5	1-1/2	6	—	350	Plain	4
5PHL-SW	5	1-1/2	6	4	350	Plain	4-1/2

Pneumatic



8PN-SW

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
8PN-RG	8	2-1/2	10	—	350	Ball	5
8PN-SW	8	2-1/2	10	6-3/4	350	Ball	5-1/2
10PN-RG	10	3-1/2	12	—	400	Ball	5-1/2
10PN-SW	10	3-1/2	12	8-1/4	400	Ball	6

Polyolefin



3PO-SW

5PO-SW

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
3PO-RG	3	1-1/4	3-3/4	—	250	Plain	—
3PO-SW	3	1-1/4	3-3/4	2-7/16	250	Plain	—
5PO-RG	5	1-1/2	6-1/4	—	500	Plain	—
5PO-SW	5	1-1/2	6-1/4	3-1/4	500	Plain	—

Polyurethane



6PP-SW

8PU-SW

5PUL-SW

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
5PP-RG	5	2	6-1/2	—	750	Roller	4-3/4
5PP-SW	5	2	6-1/2	4-1/4	750	Roller	4-3/4
6PP-RG	6	2	7-1/2	—	900	Roller	5
6PP-SW	6	2	7-1/2	5	900	Roller	5
8PP-RG	8	2	9-1/2	—	1000	Roller	5-3/4
8PP-SW	8	2	9-1/2	6-1/2	1000	Roller	5-3/4
8PU-RG	8	2	9-1/2	—	1000	Roller	5-3/4
8PU-SW	8	2	9-1/2	6-1/2	1000	Roller	5-3/4
5PUL-RG	5	1-1/4	6	—	350	Ball	—
5PUL-SW	5	1-1/4	6	4	350	Ball	—

Quick Find CASTER Chart



Black Rubber P 13.1



Blue Rubber P 13.1



Crown/Flat Cast Iron P 13.1



Cushion Rubber P 13.1



Flat Free Polyurethane P 13.1



Molded Rubber Cast Iron Core P 13.2



Pneumatic P 13.2



Pneumatic 13.2



Polyolefin P 13.3



Polyurethane P 13.3



Soft Tread P 13.3



Urethane on Cast Core P 13.3

Soft Tread Caster



2.5SR

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
2.5SR	2-1/2	4/5	3	2-1/4	75	Ball	3/8


Urethane on Cast Core Caster



5UC-SW

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Overall Height (in.)	Swivel Radius (in.)	Capacity Per (lbs)	Bearing Type	Weight (lbs)
5UC-RG	5	3	6-1/2	—	900	Roller	—
5UC-SW	5	3	6-1/2	4-1/4	900	Roller	—
6UC-RG	6	3	7-1/2	—	900	Roller	—
6UC-SW	6	3	7-1/2	5	900	Roller	—
8UC-RG	8	3	9-1/2	—	1000	Roller	—
8UC-SW	8	3	9-1/2	6-1/2	1000	Roller	—

Blue Rubber Wheel



5RSX

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Capacity Per (lbs)	Bore (in.)	Hub Length (in.)	Weight (lbs)
5RSX	5	1-1/4	300	3/16	1-7/8	1

Cushion Rubber



8C

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Capacity Per (lbs)	Bore (in.)	Hub Length (in.)	Weight (lbs)
8C	8	2-1/2	450	5/8	2-1/4	3
10C	10	2-1/2	550	5/8	2-1/4	4-1/2
14C	14	2-3/4	1000	5/8	3	6-1/2

Flat Free Polyurethane



10FF

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Capacity Per (lbs)	Bore (in.)	Hub Length (in.)	Weight (lbs)
10FF	10-1/2	4	300	5/8	2-1/4	4-1/4

Molded Rubber on Cast Iron Core



6MR



8MR



10MR

Part Number	Wheel Dia. (in.)	Tread Width (in.)	Capacity Per (lbs)	Bore (in.)	Hub Length (in.)	Weight (lbs)
6MR	6	2	450	3/4	2-1/4	6
8MR	8	2	525	3/4	2-1/4	7
10MR	10	2-1/2	800	1	2-3/4	13-1/2
12MR	12	2-1/2	950	1	2-3/4	17

Quick Find WHEEL Chart



Blue Rubber
P 13.4



Cushion Rubber
P 13.4



Flat Free
Polyurethane
P 13.4



Molded Rubber
P 13.4



Pneumatic
P 13.4



Polyolefin
P 13.5



Polyurethane
P 13.5



Solid Rubber
P 13.5

Phenolic Resin	Part Number	Wheel Dia. (in.)	Tread Width (in.)	Capacity Per (lbs)	Bore (in.)	Hub Length (in.)	Weight (lbs)
 12PH	12PH	12	2-1/2	3000	1	3-1/4	11-1/2

Pneumatic	Part Number	Wheel Dia. (in.)	Tread Width (in.)	Capacity Per (lbs)	Bore (in.)	Hub Length (in.)	Weight (lbs)
 8PN	8PN	8	2	250	5/8	3-1/4	3-1/2
 10PN	10PN	10	3	250	5/8	2-1/2	4
 16PN	16PN	16	3	680	1	2-3/4	6

Polyolefin	Part Number	Wheel Dia. (in.)	Tread Width (in.)	Capacity Per (lbs)	Bore (in.)	Hub Length (in.)	Weight (lbs)
 3PO	3PO	3	1-1/2	300	1/2	1-5/8	1/2
 6PO	6PO	6	2	700	3/4	2-1/5	1-1/4
 8PO	8PO	8	2	900	3/4	2-1/5	1-1/2


Polyurethane	Part Number	Wheel Dia. (in.)	Tread Width (in.)	Capacity Per (lbs)	Bore (in.)	Hub Length (in.)	Weight (lbs)
	5PP	5	2	750	3/4	2-1/5	1-1/2
	6PP	6	2	900	3/4	2-1/5	2
	8PP	8	2	1000	3/4	2-1/5	1-1/2

Solid Rubber	Part Number	Wheel Dia. (in.)	Tread Width (in.)	Capacity Per (lbs)	Bore (in.)	Hub Length (in.)	Weight (lbs)
 6SR	6SR	6	2	350	9/16	2-7/8	2-1/2
 8SR	8SR	8	2	450	9/16	2-7/8	3-1/2
 10SR	10SR	10	2	550	9/16	2-7/8	5

Quick Find
WHEEL
ChartBlue Rubber
P 13.4Cushion Rubber
P 13.4Flat Free
Polyurethane
P 13.4Molded Rubber
P 13.4Phenolic Resin
P 13.4Pneumatic
P 13.4Polyolefin
P 13.5Polyurethane
P 13.5Solid Rubber
P 13.5

Safety Handrails


- 1 1/2" pipe construction (1.9" OD)
- Heavy duty all-welded construction
- 7" x 3" x 3/8" plate with pre-drilled 3/4" diameter holes for secure anchoring
- 5/8" wedge anchors (optional)
- 42" overall height
- Available in 2', 3', 4', 5', 6', 8', and 10' lengths
- Available with or without toeboards
- Durable yellow powder coat finish

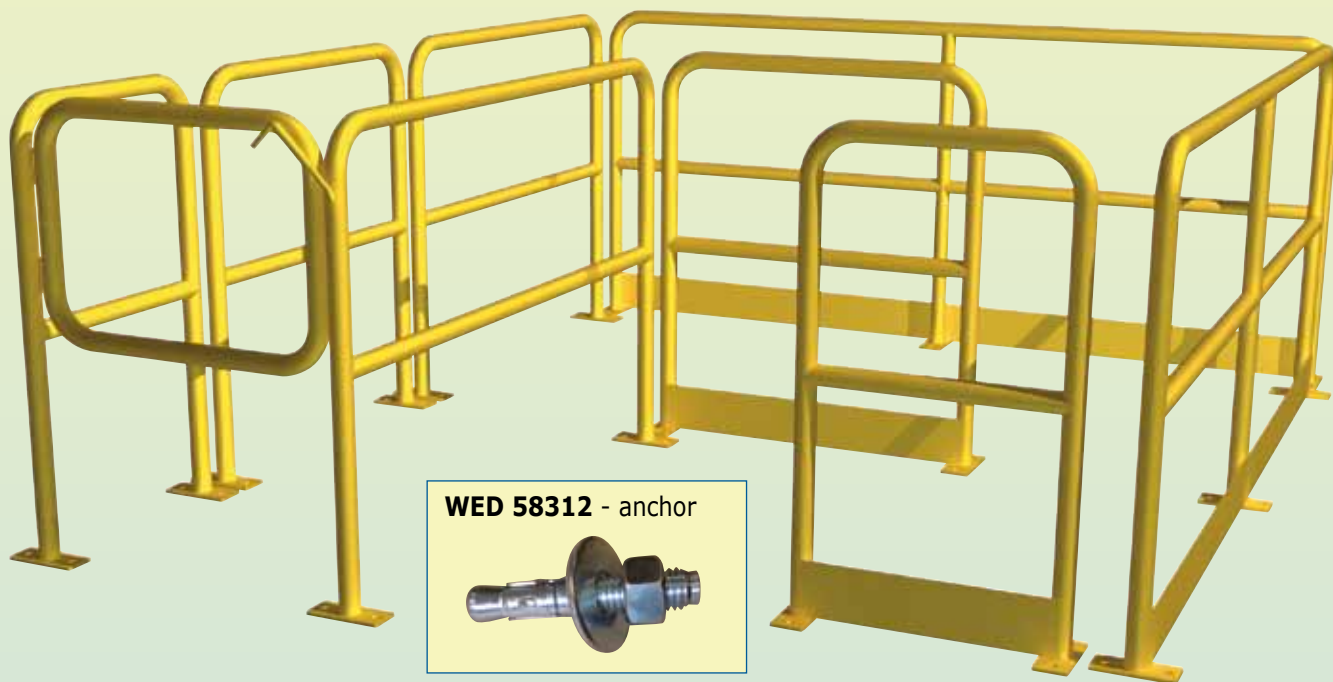

WED 58312 - anchor



	Part Number	Overall Length (in.)	Weight (lb.)	Shipping Size (in.) LxWxH
Without toeboard	HR24	24	33	26x7x42
	HR36	36	38	38x7x42
	HR48	48	43	50x7x42
	HR60	60	48	62x7x42
	HR72	72	54	74x7x42
	HR96	96	76	98x7x42
	HR120	120	87	122x7x42
With toeboard	HR24-TB	24	42	26x7x42
	HR36-TB	36	51	38x7x42
	HR48-TB	48	60	50x7x42
	HR60-TB	60	70	62x7x42
	HR72-TB	72	80	74x7x42
	HR96-TB	96	110	98x7x42
	HR120-TB	120	130	122x7x42
Gates	Part Number	Gate Opening (in.)		
	HRG-30R	30 - Right	28	30x22
	HRG-30L	30 - Left	28	30x22
	HRG-36R	36 - Right	34	36x22
	HRG-36L	36 - Left	34	36x22

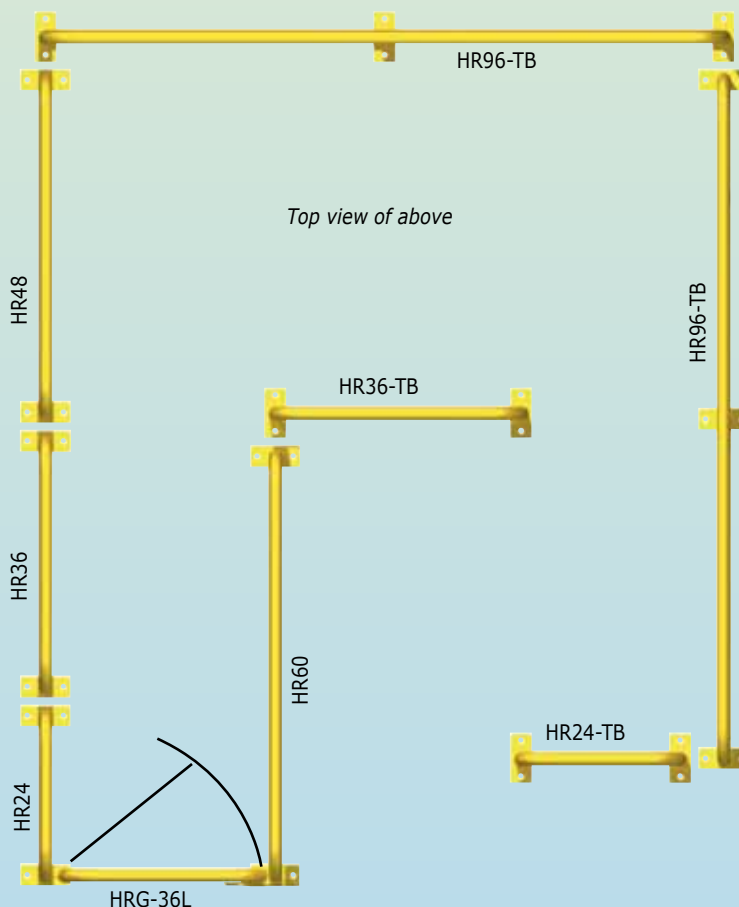



Work Platform



Material Storage Rack



Able Sail Lift



Able Sail Lift



Racking



Custom Handtruck

Please contact us for information on a customized product for your specific requirements.

sales@canwayequipment.com
905.578.2929

♦ Stock item

Did you know we offer inspection, service and repairs of Canway Mobile Ladder stands and Work Platforms?

Please contact us with:

- ☐ **Quantity** of ladders and platforms.
- ☐ **Photos** of at least one ladder and or work platform complete with close up of manufacturers identification label.
- ☐ **Photos of obvious repairs** that are required, this allows us to quote parts.
- ☐ **Location** and **hours** of operation where inspections and service will occur.
- ☐ Anticipated **completion date**.

Inspection, service and repairs costs will be based on our current rate sheet.

Inspection of other manufacturers product is possible, however, compliance to the applicable standards would be evaluated.

Recommendations and repairs would be reviewed on site with our technician.



For more information, please call us at 905.578.2929 or email us at sales@canwayequipment.com



2 stage wash



Custom car frame



Powder application



Infrared cure oven



Final assembly and packaging

Custom Powder Coating

Specifications

- Profile capability of 4' wide x 8' tall x 24' long
- System designed for light fabricated steel products
- Thicknesses from 14 gauge to 1/4"
- Weight capacity of 2 tons
- Lift or hang points must be provided

Our system

- Two stage pressure chemical wash
- Chemical rust inhibiting undercoating
- High quality, UV rated, polyester TGIC-free colors
- Leading edge technology creating an excellent finish
- Merc blue is the standard colour.

Paint Options

Standard colours include:

Paint Name	Paint Colour Code
Merc Blue	PF4041-G6
Red	SPF508-G8
School Bus Yellow	PF675-G8
Traffic White	SPF704-G8
Black	PF279-G5
Grey	SPF224-G8
Safety Orange	H630-G8


For any inquiries or quotes, email us at **info@canwayequipment.com**.

- ☐ Provide size, weight, quantity, colour and photos of products.
- ☐ No sandblasting services available



Photo Gallery

- A**
A-Frame Cart..... 2.2
Heavy Duty 2.2
Able Sail Lift 15.1
Aluminum Deck Dolly 3.1
Aluminum Deck Platform Truck..... 7.5
Angle Frame Dolly 3.1
Appliance Trucks 1.1-1.2
Attachment, Lift Truck..... 11.1-11.3
- B**
Baggage Cart..... 1.8
Baggage Hand Truck 1.10
Bar Storage Rack..... 10.1
Bicycle Rack..... 10.2
Box Carts 8.1
Bread Delivery Hand Truck..... 1.10
Bus Access Platform..... 12.18
- C**
Caddy,
Edge Stacking Table..... 2.1
Flat Stacking Table..... 2.1
Light Bulb..... 11.2
Cage,
Gas Cylinder 9.1
Cantilever Ladder 12.13
Cart,
A-Frame..... 2.2
Cylinder 3.3-3.6
Drywall 2.1
Fold-Away Shelf 4.5
Library 5.2
Lock-up Security 8.2
Lumber 2.1-2.2
Mesh Box 8.1
Order..... 4.4
Panel 2.2
Quick Turn 5.1
Removable Shelf 4.5
Service 4.1-4.3
Steel Box 8.1
Stock 5.1-5.2
Stock Picker..... 6.1-6.2
Three-Sided..... 8.2
Utility 4.4
Casters 13.1-13.3
Chair Mover Hand Truck 1.8
Convertible Hand Truck 1.9
Crossover Ladder 12.13
Custom Powder Coating..... 17.1
Custom Products 15.1
Cylinder Carts, 3.3-3.6
Single 3.3-3.4
Double 3.4
Heavy Duty Single 3.5
Heavy Duty Double 3.5
Firewalled 3.6
Light Duty 3.6
Swift Lift 3.6
- D**
Dispenser Mover Drum Truck..... 3.2
Dolly,
Aluminum Deck 3.1
Angle Frame 3.1
Steel Deck 3.1
Steel Drum 3.1
Double Cylinder Cart..... 3.4-3.6
Drum Rocker, 3.3
Swivel..... 3.3
Drum Truck, 3.2-3.3
Dispenser Mover..... 3.2
Open 3.3
Pallet Loader..... 3.2
Self Stander 3.2
Standard..... 3.2
Drum Upender 3.1
Drywall Cart 2.1
- E**
Edge Stacking Table Caddy 2.1
Elevated Work Platform 11.2
- F**
Flat Stacking Table Caddy 2.1
Firewalled Cylinder Cart..... 3.6
Fold-Away Shelf Cart..... 4.5
- Furniture Truck..... 7.2
- G**
Gas Cylinder Cage 9.1
Gas Cylinder Lift Cart 3.6
Gated Walk-Through Option,
H Series 12.14
- H**
Hand Truck 1.1-1.10
Appliance 1.1-1.2
Baggage..... 1.8 and 1.10
Bread Delivery 1.10
Chair Mover 1.8
Convertible 1.9
Custom 15.1
D-Handle..... 1.4
Double Hook Handle 1.7-1.8
Ergonomic Design..... 1.5
Heavy Duty Loop Handle 1.4
Heavy Duty Double Grip 1.5
High Double Handle 1.6
High Loop Handle 1.6
Keg Delivery 1.10
Pail Trucker..... 1.7
Standard Double Grip Handle 1.3
Standard Loop Handle 1.3
Super Heavy Duty 1.7
Warehouse 1.9
Handrail 14.1
High Deck Stock Cart 5.1
Hopper, Self-dumping..... 11.3
- I**
Inspections, Ladders and Work
Platforms 16.1
- K**
Keg Delivery Hand Truck..... 1.10
- L**
Ladder, 12.1-12.18
Bus Access Platform..... 12.18
Cantilever..... 12.16
Crossover 12.15
Inspection 16.1
Lever Lift..... 12.11
Lock'n'Stock 12.10
Mechanic's..... 12.9
Mobile Ladder Stand,
..... 12.1-12.8, 12.11-12.12
Aluminum Handrail 12.4
Aluminum No Handrail..... 12.1
Aluminum Safety Angle No
Handrail 12.2
Electric Shelf Lift..... 12.13
Handrail 12.3
Manual Shelf Lift..... 12.14
No Handrail..... 12.1
Rotate in Place Handrail..... 12.7
Rotate in Place Safety
Angle Handrail 12.8
Safety Angle Handrail..... 12.5
Safety Angle No Handrail 12.2
Stainless Steel Handrail 12.4
Stainless Steel No Handrail 12.1
Stainless Steel Rotate in
Place Handrail 12.7
Stainless Steel Rotate in
Place Safety Angle 12.8
Stainless Steel Safety
Angle Handrail..... 12.6
Stainless Steel Safety
Angle No Handrail 12.2
Ladder Options,
Diamond Channel Grating..... 12.12
Gated Walk-Through 12.12
Tool Tray 12.12
Vertical Pickets..... 12.12
Repair..... 16.1
Service 16.1
Step Stool 12.10
Rolling Dock 12.17
Rolling Work Platform 12.12
Tilt and Roll 12.9-12.10
Trailer Access..... 12.11
Lever Lift Ladder 12.11
Library Cart 5.2
- Lift Truck Attachment, 11.1-11.3
Elevated Work Platform 11.2
Pallet Puller 11.2
Self-Dumping Hopper..... 11.3
Work Platform 11.1
Light Bulb Caddy 11.2
Liquid Propane Gas Cylinder Cage..... 9.1
Lock'n'Stock Ladder 12.10
Low Deck Stock Cart..... 5.1
Low Profile Shop Truck 4.5
Lumber Cart, Standard Duty 2.1
Lumber Cart, Heavy Duty 2.2
- M**
Machine Stand 4.6
Material Storage Rack, Custom..... 15.1
Mechanic's Ladder 12.9
Mesh Box Cart..... 8.1
Mobile Bar Storage Rack..... 10.1
Mobile Ladder Stand 12.1-12.18
Aluminum Handrail 12.4
Aluminum No Handrail 12.1
Aluminum Safety Angle No
Handrail 12.2
Bus Access Platform..... 12.18
Cantilever..... 12.16
Electric Shelf Lift 12.13
Handrail 12.3
Lever Lift..... 12.11
Lock'n'Stock 12.10
Manual Shelf Lift 12.14
Mechanic's..... 12.9
No Handrail 12.1
Rolling Work Platform..... 12.12
Rotate in Place Handrail..... 12.7
Rotate in Place Safety Angle
Handrail 12.8
Safety Angle Handrail..... 12.5
Safety Angle No Handrail 12.2
Stainless Steel Handrail 12.4
Stainless Steel No Handrail 12.1
Stainless Steel Rotate in Place
Handrail 12.7
Stainless Steel Rotate in
Place Safety Angle 12.8
Stainless Steel Safety Angle
Handrail 12.6
Stainless Steel Safety Angle
No Handrail 12.2
Step Stool 12.10
Tilt & Roll 12.9
Trailer Access..... 12.11
Mobile Tire Rack 10.2
- N**
No Handrail Mobile
Ladder Stand 12.1, 12.2
- O**
Open Drum Truck 3.3
Options,
Colours 17.1
Ladder 12.12
Order Cart..... 4.4
- P**
Pail Trucker..... 1.7
Pallet Loader Drum Truck..... 3.2
Pallet Puller 11.2
Panel Truck 2.2
Photo Gallery 18.1
Platform,
Work 11.1-11.2, 15.1
Bus Access 12.16
Platform Truck..... 7.1-7.5
Aluminum Deck..... 7.5
Cushion Ride..... 7.3
Extra Heavy Duty 7.3
Furniture Truck..... 7.2
Heavy Duty 7.2
Heavy Duty Wood Deck 7.5
Light Duty 7.1
Light Duty Wood Deck..... 7.4
Medium Duty 7.1
Semi-Live Skid..... 7.6
Wagon 7.6
Wood Deck 7.4
Powder Coating 17.1
- Q**
Quick Turn Stock Cart 5.1
- R**
Rack, 10.1-10.2
Bicycle 10.2
Custom 15.1
Mobile Bar Storage 10.1
Tire Rack..... 10.2
Vertical Bar Storage..... 10.1
Removable Shelf Cart..... 4.5
Repairs, Ladders & Work Platforms..... 16.1
Rolling Dock Ladder 12.15
Rolling Lock-up Security Cart 8.2
Rolling Work Platform..... 12.12
- S**
Safety Handrail 14.1
Security Cart 8.2
Self-Dumping Hopper..... 11.3
Self Stander Drum Truck 3.2
Semi-Live Skid Platform Truck 7.6
Service, Ladders & Work Platforms..... 16.1
Service Cart..... 4.1-4.3
Extra Heavy Duty Three-Shelf 4.2
Extra Heavy Duty Two-Shelf..... 4.1
Five-Shelf..... 4.3
Four-Shelf 4.3
Two-Shelf 4.1
Three-Shelf 4.2
Shelf Cart 4.5
Shop Truck 4.5
Single Cylinder Cart..... 3.3-3.6
Solid Deck Stock Cart..... 5.2
Specialty Products 15.1
Stand,
Machine 4.6
Mobile Ladder 12.1-12.8, 12.11-12.12
Standard Drum Truck..... 3.2
Steel Box Cart..... 8.1
Steel Deck Platform Truck..... 7.1-7.3
Steel Deck Dolly 3.1
Steel Drum Dolly 3.1
Step Stool 12.10
Stock Cart, 5.1
High Deck 5.1
Low Deck 5.1
Quick Turn 5.1
Solid Deck 5.2
Stock Picker..... 6.1-6.2
Storage Rack, Custom..... 15.1
Swift Lift Gas Cylinder Lift Cart..... 3.6
Swivel Drum Rocker..... 3.3
- T**
Three-Sided Cart, 8.2
Mesh Cart..... 8.2
Steel Cart..... 8.2
Tilt and Roll Ladder..... 12.9
Tire Racks 10.2
Trailer Access Ladder 12.11
Truck,
Appliance 1.1-1.2
Hand 1.3-1.10
Drum 3.2-3.3
Panel 2.2
Platform 7.1-7.6
Shop..... 4.5
Wagon 7.6
- U**
Utility Cart..... 4.4
- V**
Vertical Bar Storage Rack 10.1
- W**
Wagon Truck..... 7.6
Wall Mounted Tire Rack 10.2
Warehouse Hand Truck..... 1.9
Wheels..... 13.4-13.5
Wood Deck Platform Truck 7.4-7.5
Work Bench 4.6
Work Platform..... 11.1-11.2, 15.1

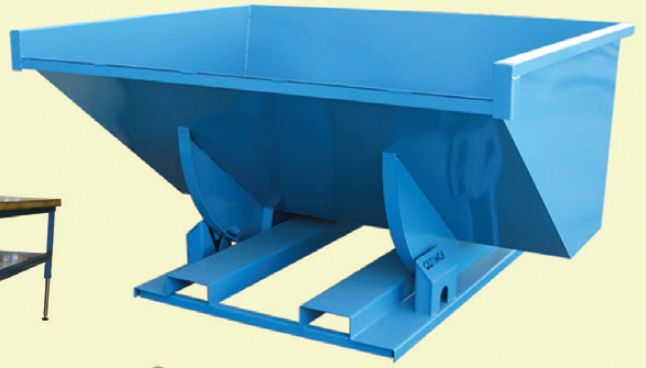

*Talk to us about
your custom
requirements*



Your Authorized **CANWAY** Dealer:

